



IP54

UL TYPE 12

HL3 EN 45545-2

E45 E130 EN 45545-3 Page 197

UV ISO 4892-2A


ECOLAB certified

RoHS compliant

Made in Germany



KT Grommets, small, multi & special grommets

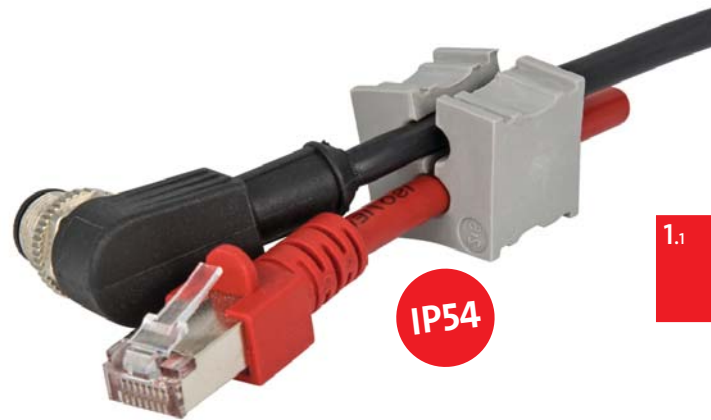

IP54

1.1

Description	Type	Order No grey	Order No black	Clamping range	PU
KT 2 x	KT 2 1	39942	39944	2x ø 1 mm	10
	KT 2 2	39935	39936	2x ø 2 mm	10
	KT 2 3	39939	39940	2x ø 3 mm	10
	KT 2 4	39906	39907	2x ø 4 mm	10
KT 4 x	KT 2 5	41200	39904	2x ø 5 mm	10
	KT 2 6	41201	39905	2x ø 6 mm	10
	KT 2 7	41202	39916	2x ø 7 mm	10
	KT 2 8	39917	39918	2x ø 8 mm	10
KT ASI2 rl	KT 4 2	39937	39938	4x ø 2 mm	10
	KT 4 3	39914	39915	4x ø 3 mm	10
	KT 4 4	39909	39911	4x ø 4 mm	10
KT ASI2 ll	KT 4 5	39908	39910	4x ø 5 mm	10
	KT 4 6	39932	39933	4x ø 6 mm	10
KT oval	KT-ASI	39902	39903	1 ASI-cable	10
	KT-ASI2 rl	39922	39924	2 ASI-cables	10
	KT-ASI2 ll	39921	39923	2 ASI-cables	10
KT S1	KT oval	39930	-	approx. 8 x 4 mm	10
	KT tele	39931	-		10
KT tele1	KT tele	39929	-	Telephone cable	10
	KT tele1	41257	-	Data cable RJ12	10
KT tele2	KT tele2	41258	-	Data cable RJ10 / RJ45	10

*Only valid for grey product types

Specifications KT grey

Material: Elastomer
 Flame class: UL94-Vo, self-extinguishing
 IP rating: KT round, single: up to IP66/IP68
 KT round, multi: IP54
 KT special, multi: IP54
 UL type rating: up to UL type 4X (acc. to UL 50E)
 Temperature: -40°C to +90°C (static)
 Properties: Halogen-free, silicone-free

Specifications KT black

Material: Elastomer
 Flame class: UL94-HB
 IP rating: KT round, single: up to IP66/IP68
 KT round, multi: IP54
 KT special, multi: IP54
 Temperature: -30°C to +90°C (static)
 Properties: Higher chemical resistance

Specifications PCE 12

Material: Polyamide 6
 Membrane: Polyacrylate
 IP rating: IP65
 Temperature: -30°C to +90°C (static)
 Air flow: ΔP = 70 mbar, min. 50 l/h

Accessories

ST Plugs 53