


## Miniature Photoelectric Switches (Built-in Amplifier)

# SA1E



User-friendly, high-performance  
photoelectric switches



• See website for details on approvals and standards.



Through-beam



Polarized retro-reflective



Diffuse-reflective



Background suppression (BGS)



Small-beam reflective




Coaxial polarized retro-reflective

## Output reverse-polarity protection circuit


Several SA1E models are protected from incorrect wiring:

- Through-beam
- Polarized retro-reflective
- Diffuse-reflective
- Background Suppression (BGS)
- Small-beam Reflective

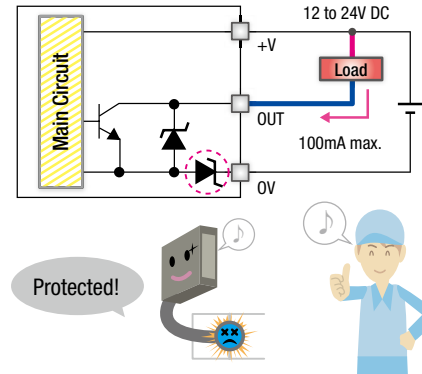


## Long Distance Detection

Ideal for a wide range of application.

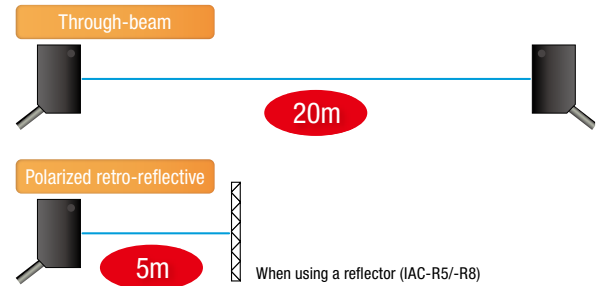


## Various accessories

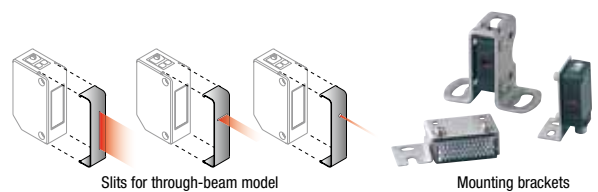

## Background Suppression (BGS)


### Detects objects of different colors

The improved sensing ability detects objects of different colors such as black and white more accurately.

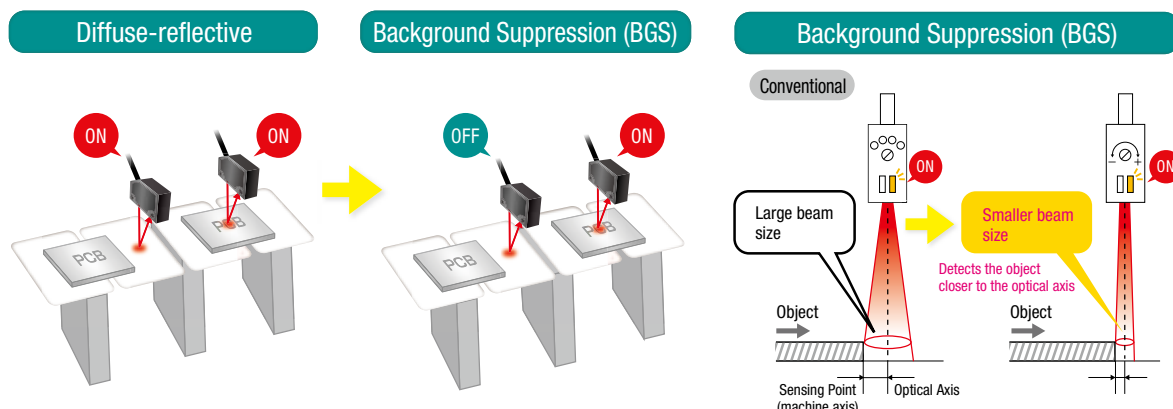


### Ignores the background and detects the objects only

Smaller beam makes it possible to detect small objects and narrow gaps between the objects. The upgraded model is also less affected by the object colors.

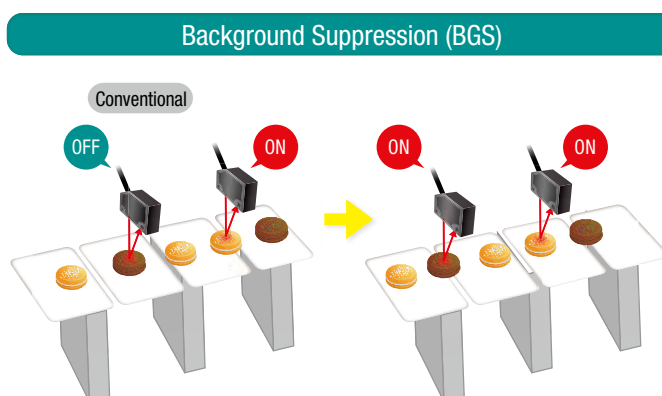

## Coaxial Polarized Retro-reflective (Transparent Object Sensing)

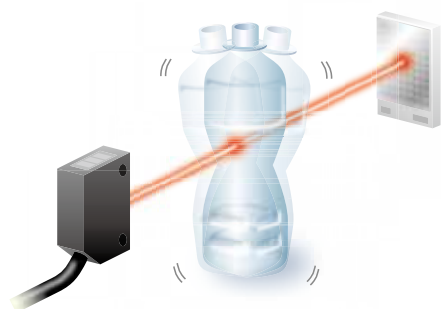


Coaxial optical structure and narrow beam ensure stable detection; unaffected by narrowing, inclination or shaking of a bottle.

Unaffected by object shapes.




### Application Example




Mail sorting

### Polarized Retro-reflective (non-coaxial)



### Coaxial Polarized Retro-reflective




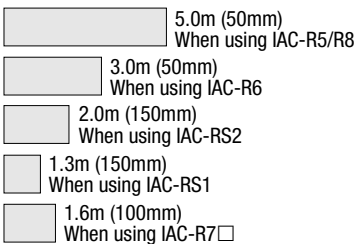







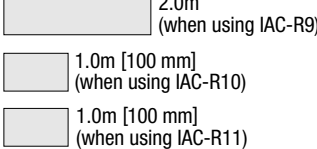


Because the SA1E-X co-axial polarized retroreflective model does not have blind zone, where the reflected light misses the light receiving element, like the SA1E-P polarized retro-reflective type, the SA1E-X can be used in applications where objects pass near the sensor.



# SA1E Miniature Photoelectric Switches (Built-in Amplifier)

Package Quantity: 1

Sensing Method			Sensing Range	Connection	Cable Length	Operation Mode	Part No.		
							NPN Output	PNP Output	
Through-beam	Infrared LED	w/Sensitivity Adjustment		 20m	Cable	1m	Light ON	SA1E-TN1	SA1E-TP1
							Dark ON	SA1E-TN2	SA1E-TP2
						2m	Light ON	SA1E-TN1-2M	SA1E-TP1-2M
							Dark ON	SA1E-TN2-2M	SA1E-TP2-2M
						5m	Light ON	SA1E-TN1-5M	SA1E-TP1-5M
							Dark ON	SA1E-TN2-5M	SA1E-TP2-5M
See the characteristics on <b>M-011</b> .			M8 Connector	—	Light ON	SA1E-TN1C	SA1E-TP1C		
					Dark ON	SA1E-TN2C	SA1E-TP2C		
Polarized Retro-reflective	Red LED	w/Sensitivity Adjustment	 Note: Maintain at least the distance shown in the ( ) between the SA1E photoelectric switch and reflector. Reflectors are not supplied and must be ordered separately.	 5.0m (50mm) When using IAC-R5/R8 3.0m (50mm) When using IAC-R6 2.0m (150mm) When using IAC-RS2 1.3m (150mm) When using IAC-RS1 1.6m (100mm) When using IAC-R7□ See the characteristics on <b>M-012</b> .	Cable	1m	Light ON	SA1E-PN1	SA1E-PP1
							Dark ON	SA1E-PN2	SA1E-PP2
						2m	Light ON	SA1E-PN1-2M	SA1E-PP1-2M
							Dark ON	SA1E-PN2-2M	SA1E-PP2-2M
						5m	Light ON	SA1E-PN1-5M	SA1E-PP1-5M
							Dark ON	SA1E-PN2-5M	SA1E-PP2-5M
See the characteristics on <b>M-012</b> .			M8 Connector	—	Light ON	SA1E-PN1C	SA1E-PP1C		
					Dark ON	SA1E-PN2C	SA1E-PP2C		
Diffuse-reflective	Infrared LED	w/Sensitivity Adjustment		 700 mm	Cable	1m	Light ON	SA1E-DN1	SA1E-DP1
							Dark ON	SA1E-DN2	SA1E-DP2
						2m	Light ON	SA1E-DN1-2M	SA1E-DP1-2M
							Dark ON	SA1E-DN2-2M	SA1E-DP2-2M
						5m	Light ON	SA1E-DN1-5M	SA1E-DP1-5M
							Dark ON	SA1E-DN2-5M	SA1E-DP2-5M
See the characteristics on <b>M-012</b> .			M8 Connector	—	Light ON	SA1E-DN1C	SA1E-DP1C		
					Dark ON	SA1E-DN2C	SA1E-DP2C		
Background Suppression	Red LED	w/Sensing Range Adjustment	 Adjustable Sensing Range	 20 to 200 mm 40 to 200 mm Adjustable Sensing Range See the characteristics on <b>M-012</b> .	Cable	1m	Light ON	SA1E-BN1	SA1E-BP1
							Dark ON	SA1E-BN2	SA1E-BP2
						2m	Light ON	SA1E-BN1-2M	SA1E-BP1-2M
							Dark ON	SA1E-BN2-2M	SA1E-BP2-2M
						5m	Light ON	SA1E-BN1-5M	SA1E-BP1-5M
							Dark ON	SA1E-BN2-5M	SA1E-BP2-5M
See the characteristics on <b>M-012</b> .			M8 Connector	—	Light ON	SA1E-BN1C	SA1E-BP1C		
					Dark ON	SA1E-BN2C	SA1E-BP2C		
Small-beam Reflective	Red LED	w/Sensitivity Adjustment		 50 to 150 mm	Cable	1m	Light ON	SA1E-NN1	SA1E-NP1
							Dark ON	SA1E-NN2	SA1E-NP2
						2m	Light ON	SA1E-NN1-2M	SA1E-NP1-2M
							Dark ON	SA1E-NN2-2M	SA1E-NP2-2M
						5m	Light ON	SA1E-NN1-5M	SA1E-NP1-5M
							Dark ON	SA1E-NN2-5M	SA1E-NP2-5M
See the characteristics on <b>M-012</b> .			M8 Connector	—	Light ON	SA1E-NN1C	SA1E-NP1C		
					Dark ON	SA1E-NN2C	SA1E-NP2C		
Coaxial Polarized Retro-reflective	Red LED	With Sensitivity Adjustment	 Note: Reflector is not supplied and must be ordered separately.	 2.0m (when using IAC-R9) 1.0m [100 mm] (when using IAC-R10) 1.0m [100 mm] (when using IAC-R11) See the characteristics on <b>M-013</b> .	Cable	1	Light ON	SA1E-XN1	SA1E-XP1
							Dark ON	SA1E-XN2	SA1E-XP2
						2	Light ON	SA1E-XN1-2M	SA1E-XP1-2M
							Dark ON	SA1E-XN2-2M	SA1E-XP2-2M
						5	Light ON	SA1E-XN1-5M	SA1E-XP1-5M
							Dark ON	SA1E-XN2-5M	SA1E-XP2-5M
See the characteristics on <b>M-013</b> .			M8 Connector	—	Light ON	SA1E-XN1C	SA1E-XP1C		
					Dark ON	SA1E-XN2C	SA1E-XP2C		

## Specifications

Sensing Method	Through-beam	Polarized Retro-reflective
Part No.	SA1E-T□	SA1E-P□
Power Voltage	12 to 24V DC (Operating range: 10 to 30V DC) equipped with reverse-polarity protection	
Current Draw	Projector: 15 mA Receiver: 20 mA	30mA
Sensing Range	20m	5.0m (IAC-R5/R8) 3.0m (IAC-R6) 2.0m (IAC-RS2) 1.3m (IAC-RS1) 1.6m (IAC-R7□) (Note 1)
Adjustable Sensing Range	—	
Detectable Object	Opaque	Opaque/mirror-like objects
Hysteresis	—	
Response Time	1 ms maximum	
Sensitivity Adjustment	Adjustable using a potentiometer (approx. 240°) Through-beam and polarized retro-reflective models are also available without sensitivity adjustment.	
Sensing Range Adjustment	—	
Light Source Element	Infrared LED	Red LED
Operation Mode	Light ON/Dark ON	
Control Output	NPN open collector or PNP open collector (30V DC, 100 mA maximum, short-circuit protection) Voltage drop: 2V max. (30V DC, 100 mA max) 1.2V max. (30V DC, 10 mA max) With output reverse connection protection control circuit	
LED Indicators	Operation LED: Yellow Stable LED: Green Power LED: Green (Through-beam model projector)	
Interference Prevention	—	Two units can be mounted in close proximity.
Degree of Protection	IP67 (IEC 60529)	
Extraneous Light Immunity	Sunlight: 10,000 lx maximum, Incandescent lamp: 5,000 lux maximum (at receiver)	
Operating Temperature	-25 to +55°C (no freezing)	
Operating Humidity	35 to 85% RH (no condensation)	
Storage Temperature	-40 to +70°C (no freezing)	
Insulation Resistance	Between live part and mounting bracket: 20 MΩ maximum (500V DC megger)	
Dielectric Strength	Between live part and mounting bracket: 1000V AC, 50/60 Hz, 1 minute	
Vibration Resistance	Damage limits: 10 to 500 Hz, 90 m/s <sup>2</sup> , 1 cycle 5 mins, in each of 3 axes	
Shock Resistance	Damage limits: 1000 m/s <sup>2</sup> , 6 shocks in each of 3 axes	
Material	Case	PC/PBT
	Lens	PMMA
	Indicator Model	PC
Weight (approx.)	Cable Model	Projector: 30g, Receiver: 30g (Note 2) 30g (Note 2)
	Connector Model	Projector: 10g, Receiver: 10g 10g
Connection Method	Cable Model	ø3.5 mm, 2-core, 0.2 mm <sup>2</sup> cable ø3.5 mm, 3-core, 0.2 mm <sup>2</sup> cable
	Connector Model	M8 connector (4-pin)

Note 1: Maintain at least the distance shown below between the SA1E photoelectric switch and reflector.

IAC-R5/R6/R8: 50 mm

IAC-R7: 100 mm

IAC-RS1/RS2: 150 mm

The detection distance cannot be guaranteed if the reflector is deformed or the tape type reflector is applied on uneven surface.

Note 2: Cable length: 1m (50g when the cable length is 2m. 110g when the cable length is 5m.)

APEM

Switches &  
Pilot Lights

Control Boxes

Emergency  
Stop SwitchesEnabling  
Switches

Safety Products

Explosion Proof

Terminal Blocks

Relays &amp; Sockets

Circuit  
Protectors

Power Supplies

LED Illumination

Controllers

Operator  
Interfaces

Sensors

AUTO-ID

SA1E

SA1E-L



## SA1E Miniature Photoelectric Switches (Built-in Amplifier)

## Specifications

Sensing Method		Diffuse-reflective	Background Suppression (BGS)	Small-beam Reflective	Coaxial Polarized Retro-reflective (Transparent Object Sensing)
Part No.		SA1E-D□	SA1E-B□	SA1E-N □	SA1E-X□
Power Voltage		12 to 24V DC (Operating range: 10 to 30V DC), equipped with reverse-polarity protection			
Current Draw		30 mA			20 mA
Sensing Range		700 mm (using 200 × 200 mm white mat paper)	20 mm to preset (using 200 × 200 mm white mat paper)	50 to 150 mm (using 100 × 100 mm white mat paper)	2 m (using IAC-R9)
Adjustable Sensing Range		—	40 to 200 mm	—	
Detectable Object		Opaque/Transparent	Opaque	Opaque/Transparent	Opaque, transparent and mirror-like objects
Hysteresis		20% maximum	10% maximum	20% maximum	—
Response Time		1 ms maximum			500 μs maximum
Sensitivity Adjustment		Adjustable using a potentiometer (approx. 240°)	—	Adjustable using a potentiometer (approx. 240°)	
Sensing Range Adjustment		—	6-turn control knob	—	
Light Source Element		Infrared LED	Red LED		
Operation Mode		Light ON/Dark ON			
Control Output		NPN open collector or PNP open collector (30V DC, 100 mA maximum with short circuit protection circuit)			
		Voltage drop: 2V max. (30V DC, 100 mA) 1.2V max. (30V DC, 100 mA) Output reverse-polarity protection circuit	Voltage drop: 2V max. (30V DC, 100 mA) Output reverse-polarity protection circuit	Voltage drop: 2V max. (30V DC, 100 mA) 1.2V max. (30V DC, 100 mA) Output reverse-polarity protection circuit	Voltage drop: 2V max. (30V DC, 100mA)
LED Indicators		Operation LED: Yellow Stable LED: Green	Operation LED: Yellow	Operation LED: Yellow Stable LED: Green	Operation LED: Yellow
Interference Prevention		Two units can be mounted in close proximity.			
Degree of Protection		IP67 (IEC 60529)			
Extraneous Light Immunity		Sunlight: 10,000 lux maximum, Incandescent lamp: 5,000 lux maximum (at receiver)			
Operating Temperature		−25 to +55°C (no freezing)			
Operating Humidity		35 to 85% RH (no condensation)			
Storage Temperature		−40 to +70°C (no freezing)			
Insulation Resistance		Between live part and mounting bracket: 20 MΩ maximum (500V DC megger)			
Dielectric Strength		Between live part and mounting bracket: 1000V AC, 50/60 Hz, 1 minute			
Vibration Resistance		Damage limits: 10 to 500 Hz, 1 cycle 5 mins in each of 3 axes		Damage limits: 10 to 55 Hz, double amplitude 1.5mm, 20 cycles in each of 3 axes	
Shock Resistance		Damage limits: 1000 m/s <sup>2</sup> , 6 shocks in each of 3 axes		Damage limits: 500 m/s <sup>2</sup> , 10 shocks in each of 3 axes	
Material	Housing	PC/PBT		PBT	PC/PBT
	Lens	PMMA			
	Indicator cover	PC			
Weight (approx.)	Cable Model	30g (Note 1)	35g (Note 2)	30g (Note 1)	35g (Note 2)
	Connector Model	10g	25g	10g	20g
Connection Method	Cable Model	ø3.5 mm, 3-core, 0.2 mm <sup>2</sup> cable			
	Connector Model	M8 connector (4-pin)			

Note 1: Cable length: 1m (50g when the cable length is 2m. 110g when the cable length is 5m.)

Note 2: Cable length: 1m (55g when the cable length is 2m. 120g when the cable length is 5m.)

## Slit and Sensing Range


A slit, which changes the beam size of through-beam sensors, can easily be attached to the sensing side of the through-beam projector and receiver. Three different slit widths are available.

Slit		w/Sensitivity Adjustment			
		Sensing Range (m)		Minimum Detectable Object Width (mm) (Note 1)	
		Attached on:			
Part No.	Slit Width: A (See <b>M-017</b> )	Receiver	Receiver/Projector	Receiver	Receiver/Projector
SA9Z-S06	0.5 mm	2.5	1.0	0.5	0.5
SA9Z-S07	1.0 mm	3.5	1.5	1.0	1.0
SA9Z-S08	2.0 mm	6.0	3.5	2.0	2.0
SA9Z-S09	0.5 mm	2.0	0.7	0.5	0.5
SA9Z-S10	1.0 mm	3.0	1.5	1.0	1.0
SA9Z-S11	2.0 mm	5.5	3.0	2.0	2.0
SA9Z-S12	0.5 mm	0.8	0.08	0.5	0.5
SA9Z-S13	1.0 mm	1.5	0.3	1.0	1.0
SA9Z-S14	2.0 mm	2.5	1.2	2.0	2.0

Note 1: At 1 mm from receiver surface.

- The slit can be installed onto the front easily (see the figure at right).

The slit can be pressed to snap onto the front easily.



Horizontal slits and round slits have an orientation. Make sure that the TOP marking comes on top of the sensor (LED side).

## Output Circuit & Wiring Diagram

Through-beam


Polarized reflective

Diffuse-reflective


Background suppression (BGS)

Small-beam reflective


### NPN Output




Connector Pin Assignment




### PNP Output



Connector Pin Assignment



### Through-beam Projector




Connector Pin Assignment




## Coaxial polarized retro-reflective (Transparent Object Sensing)


### NPN Output




Connector Pin Assignment




### PNP Output




Connector Pin Assignment



### Through-beam Projector



Connector Pin Assignment





## SA1E Miniature Photoelectric Switches (Built-in Amplifier)

## Dimensions

All dimensions in mm

## Cable Model

## Through-beam

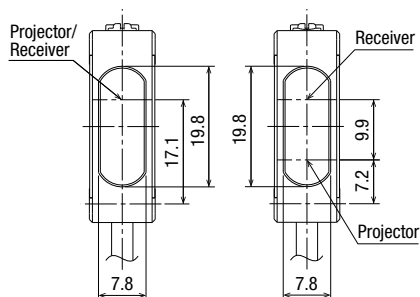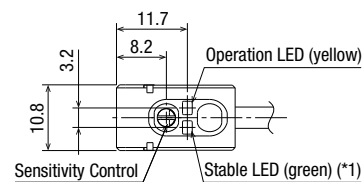


Polarized retro-reflective  
Diffuse-reflective  
Background Suppression (BGS)  
Small-beam reflective



\*1: Stable LED is not installed on background suppression (BGS) model.

Coaxial polarized retro-reflective  
(Transparent Object Sensing)

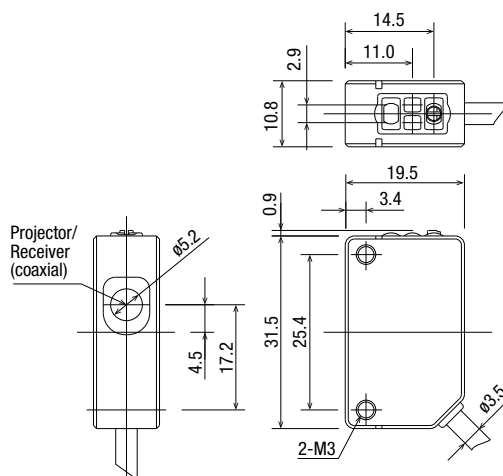

APEM

Switches &  
Pilot Lights

Control Boxes

Emergency  
Stop SwitchesEnabling  
Switches

Safety Products

Explosion Proof

Terminal Blocks

Relays &amp; Sockets

Circuit  
Protectors

Power Supplies

LED Illumination

Controllers

Operator  
Interfaces

Sensors

AUTO-ID

SA1E

SA1E-L



## Dimensions


All dimensions in mm

## Connector Model

Through-beam




Polarized retro-reflective  
 Diffuse-reflective  
 Background Suppression (BGS)  
 Small-beam reflective

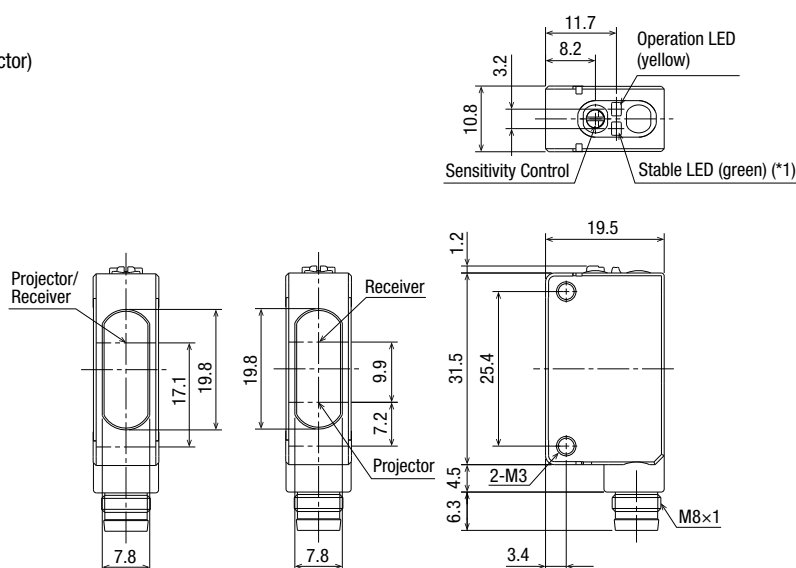

\*1: Stable LED is not installed on background suppression (BGS) model.

Coaxial polarized retro-reflective  
 (Transparent Object Sensing)

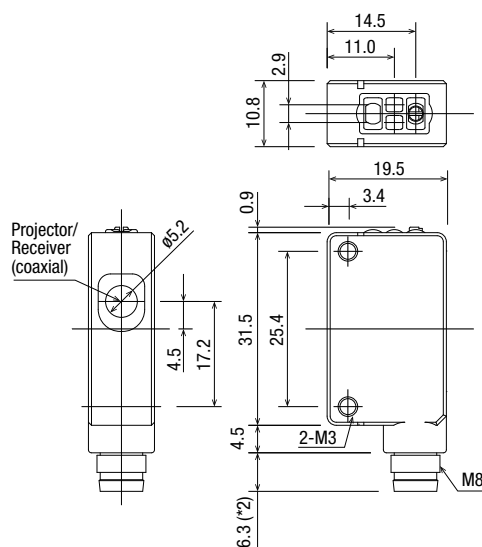

\*2: The connector length is 18 mm when a right-angle connector cable (SA9Z-CM8K-4L□) is attached.

APEM

Switches &  
Pilot Lights

Control Boxes

Emergency  
Stop SwitchesEnabling  
Switches

Safety Products

Explosion Proof

Terminal Blocks

Relays &amp; Sockets

Circuit  
Protectors

Power Supplies

LED Illumination

Controllers

Operator  
Interfaces

Sensors

AUTO-ID

SA1E

SA1E-L

Download catalogs and CAD from <http://eu.idec.com/downloads>


M-010




## Characteristics (Typical)

## 1-1. Through-beam SA1E-T□


Excess Gain (Without slit)

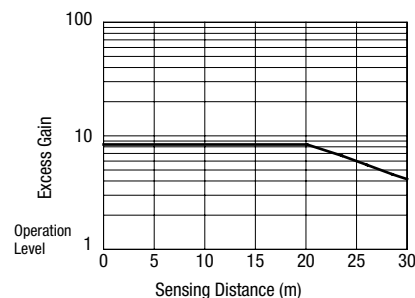


Lateral Displacement (Without slit)

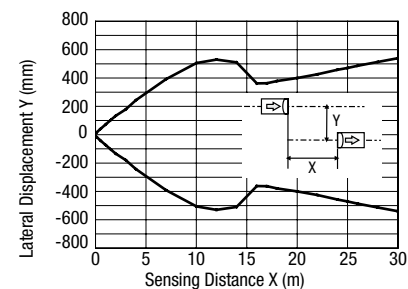


Angle (Without slit)

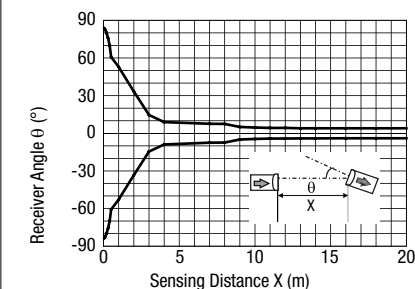


Excess Gain (With vertical slit)

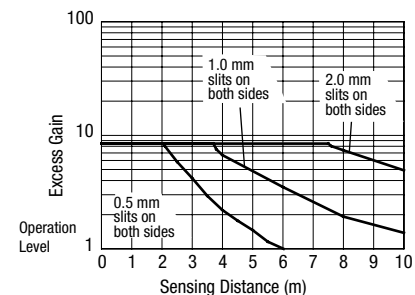


Excess Gain (With horizontal slit)

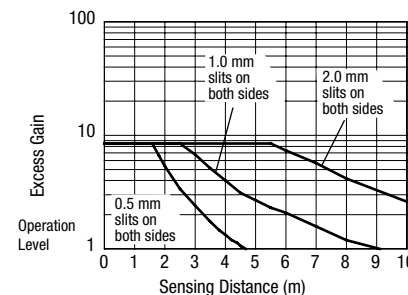


Excess Gain (With round slit)

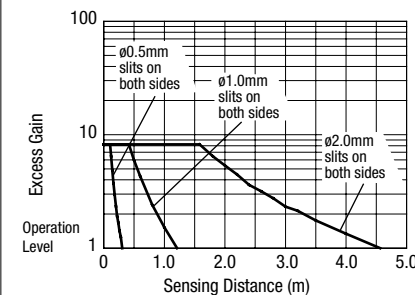


Lateral Displacement (With 0.5-mm vertical slit)

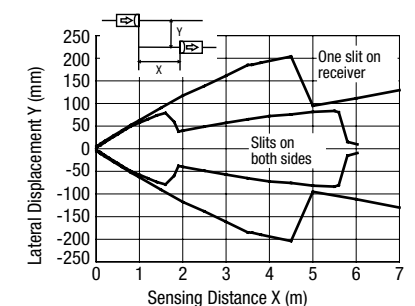


Lateral Displacement (With 1.0-mm vertical slit)

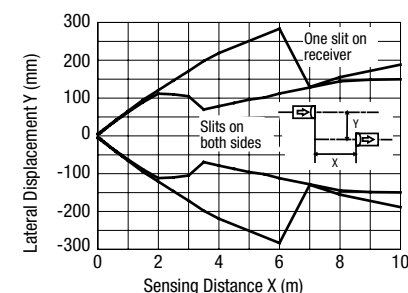


Lateral Displacement (With 2.0-mm vertical slit)

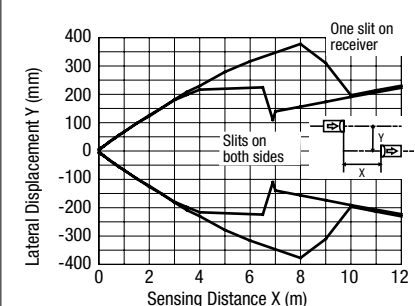


Lateral Displacement (With 0.5-mm horizontal slit)

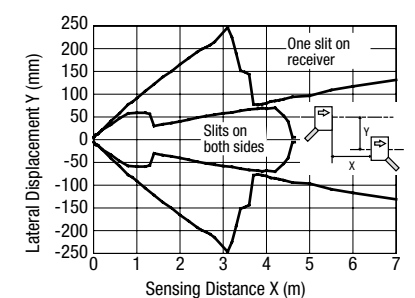


Lateral Displacement (With 1.0-mm horizontal slit)

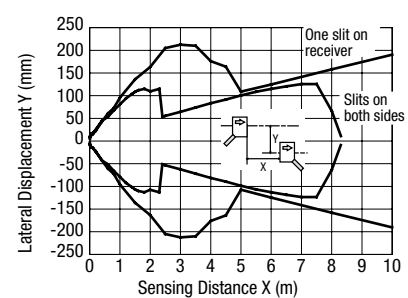


Lateral Displacement (With 2.0-mm horizontal slit)

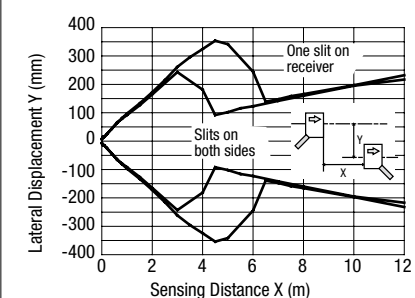


Lateral Displacement (With ø0.5-mm round slit)

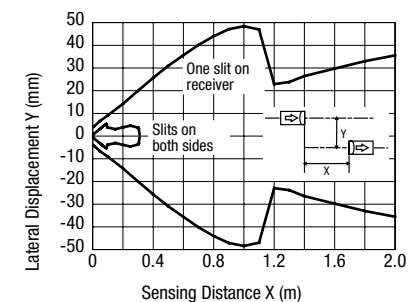

Lateral Displacement (With ø1.0-mm round slit)

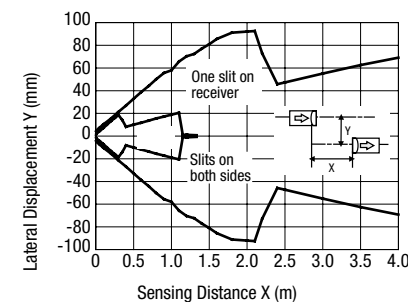


Lateral Displacement (With ø2.0-mm round slit)

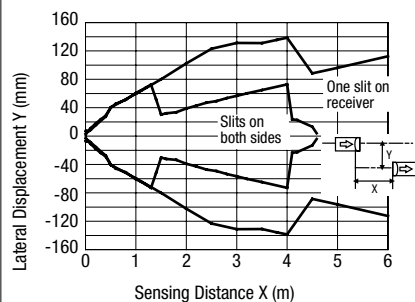


## Characteristics (Typical)

### 2. Polarized Retro-reflective SA1E-P□


Excess Gain

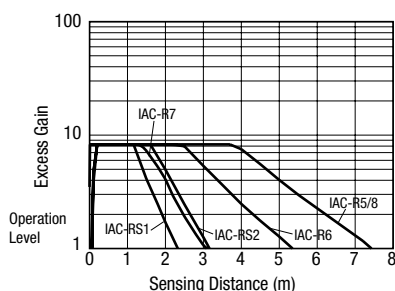

Lateral Displacement

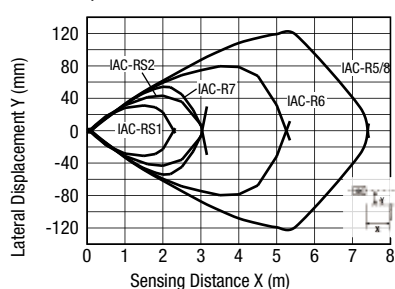


Angle (when using IAC-R5/-R8)

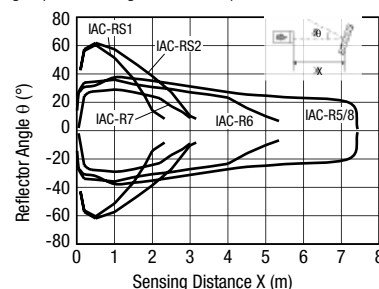


### 3. Diffuse-Reflective SA1E-D□


Excess Gain

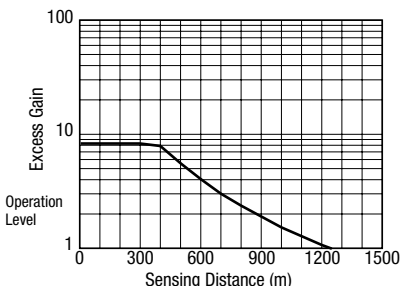

Lateral Displacement

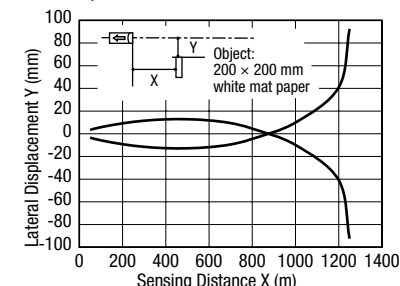


Angle (when using IAC-R5/-R8)

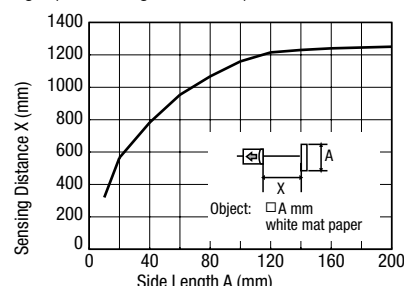


### 4. Background Suppression SA1E-B□


Lateral Displacement (Preset 100 mm)

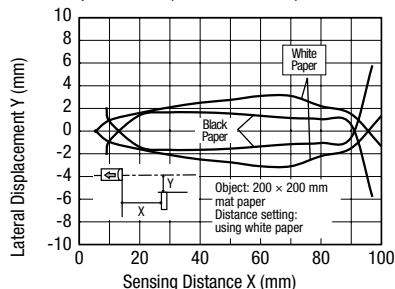


Lateral Displacement (Preset 200 mm)

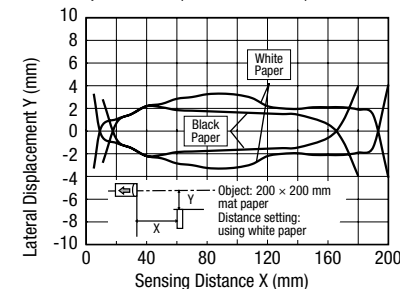


Light Beam Diameter

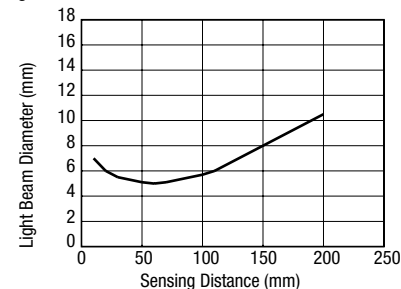


Sensing Distance vs. Hysteresis

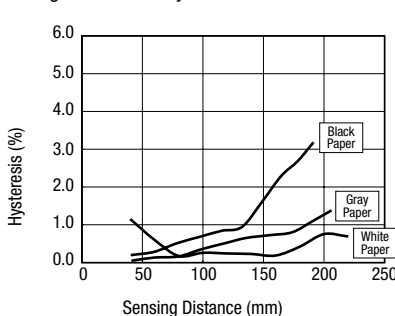

Control Knob vs. Sensing Distance

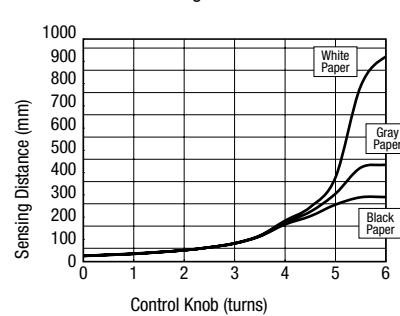


Color Matte Paper and Other Materials

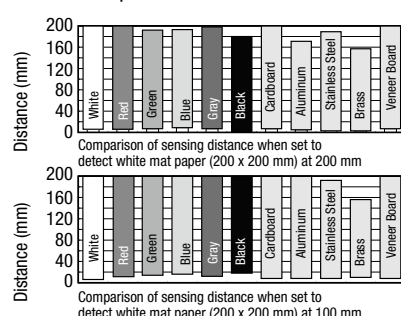


### 5. Small-beam Reflective SA1E-N□


Excess Gain

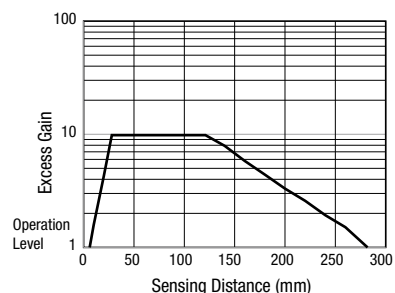

Lateral Displacement

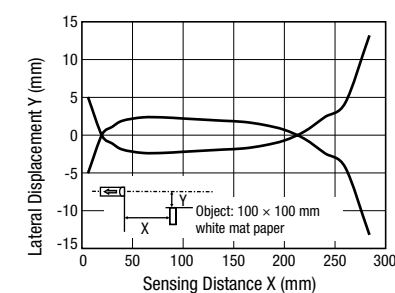


Object Size vs Sensing Distance

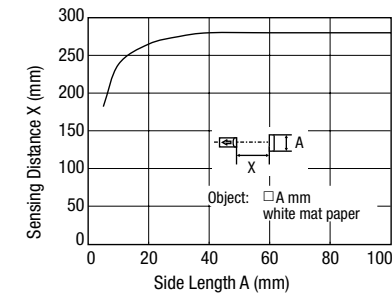


## SA1E Miniature Photoelectric Switches (Built-in Amplifier)

## 6. Coaxial Polarized Retro-reflective SA1E-X□


Excess Gain

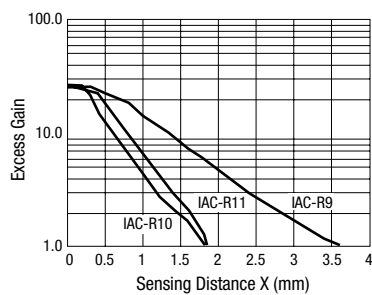


Lateral Displacement

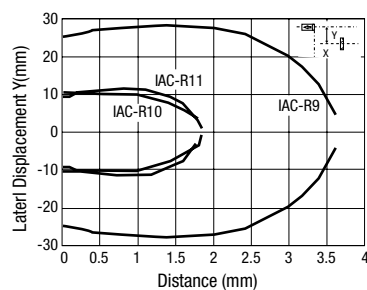

Angle

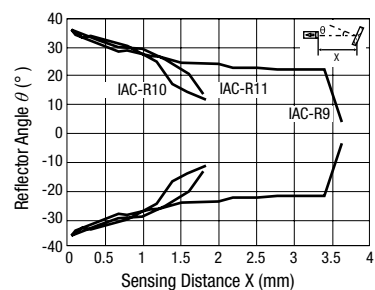

Light Beam Diameter

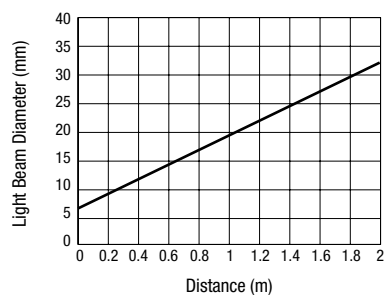

APEM

Switches &  
Pilot Lights

Control Boxes

Emergency  
Stop SwitchesEnabling  
Switches

Safety Products

Explosion Proof

Terminal Blocks

Relays &amp; Sockets

Circuit  
Protectors

Power Supplies

LED Illumination

Controllers

Operator  
Interfaces

Sensors

AUTO-ID

SA1E

SA1E-L

## Accessories (optional)

## Slits (for through-beam)

Item	Slit Size	Part No.	Ordering No.	Package Quantity
Vertical Slit	0.5 mm × 18 mm	SA9Z-S06	SA9Z-S06PN02	2
	1.0 mm × 18 mm	SA9Z-S07	SA9Z-S07PN02	
	2.0 mm × 18 mm	SA9Z-S08	SA9Z-S08PN02	
Horizontal Slit	0.5 mm × 6.5 mm	SA9Z-S09	SA9Z-S09PN02	
	1.0 mm × 6.5 mm	SA9Z-S10	SA9Z-S10PN02	
	2.0 mm × 6.5 mm	SA9Z-S11	SA9Z-S11PN02	
Round Slit	ø0.5 mm	SA9Z-S12	SA9Z-S12PN02	
	ø1.0 mm	SA9Z-S13	SA9Z-S13PN02	
	ø2.0 mm	SA9Z-S14	SA9Z-S14PN02	

## Reflectors (for polarized retro-reflective)

Item	Part No.	Package Quantity
Reflector	Standard	IAC-R5
	Small	IAC-R6
	Large	IAC-R8
	Narrow (rear/side mounting)	IAC-R7M
	Narrow (rear mounting)	IAC-R7B
	Narrow (side mounting)	IAC-R7S
	Tape Type (40 × 35 mm)	IAC-RS1
Reflector Mounting Bracket	Tape Type (80 × 70 mm)	IAC-RS2
	For IAC-R5	IAC-L2
	For IAC-R6	IAC-L3
	For IAC-R8	IAC-L5

- See **M-016** to **M-017** for dimensions.
- The IAC-L2 is not supplied with mounting screws and nuts. Use commercially available M4 screws and nuts for mounting the IAC-R5 reflector.
- The IAC-L3 is supplied with two mounting screws (M3 × 8 mm sems screws).
- The IAC-L5 is supplied with two mounting screws (M4 × 10 mm sems screws).
- The IAC-R7M and IAC-R7S are supplied with two M3 × 8 mm self-tapping screws, two flat washers, and two spring washers.
- The IAC-R7B is supplied with an M3 × 8 mm self-tapping screw, a flat washer, and a spring washer.

## Sensor Mounting Brackets

Item	Part No.	Package Quantity
Main Unit Mounting Brackets	Vertical Mounting	SA9Z-K01
	Horizontal Mounting	SA9Z-K02
	Cover type	SA9Z-K03
	Back Mounting	SA9Z-K04

- Two mounting screws (M3 × 12 mm sems screws) are supplied with the SA9Z-K01 and SA9Z-K02.
- Two mounting screws (M3 × 14 mm sems screws) are supplied with the SA9Z-K03.
- The through-beam model requires two mounting brackets, one each for the projector and the receiver.
- The SA9Z-K02 cannot be used for the connector models.
- Contact IDEC about mounting brackets for the connector.

## Connector Cable (for M8 connector model)

Number of Core Wires	Style & Length	Part No.	Package Quantity
4	Straight, 2m	SA9Z-CM8K-4S2	1
	Right angle, 2m	SA9Z-CM8K-4L2	
	Straight, 5m	SA9Z-CM8K-4S5	
	Right angle, 5m	SA9Z-CM8K-4L5	

## Reflectors

(used only for coaxial polarized retro-reflective)

Item	Part No.	Package Quantity
Reflector	Standard	IAC-R9
	Small	IAC-R10
	Ultra-small	IAC-R11
Reflector Mounting Bracket	For IAC-R9	IAC-L3

## Air Blower Mounting Block

Item	Part No.	Package Quantity
Air Blower Mounting Block	SA9Z-A02	1

- Two mounting screws (M3 × 20 mm sems screws), one M5 × 6 mm screw for plugging the air supply port, and one gasket (0.5 mm thick) are supplied.
- The air tube fitting and mounting bracket are not supplied and must be ordered separately (recommended mounting bracket: SA9Z-K01).
- Material: Anodized aluminum surface

## Sensitivity Control Screwdriver

Item	Part No.	Package Quantity
Sensitivity Control Screwdriver	SA9Z-AD01	1



APEM

Switches &amp; Pilot Lights

Control Boxes

Emergency Stop Switches

Enabling Switches

Safety Products

Explosion Proof

Terminal Blocks

Relays &amp; Sockets

Circuit Protectors

Power Supplies

LED Illumination

Controllers

Operator Interfaces

Sensors

SA1E

SA1E-L

AUTO-ID




## Accessory Dimensions

All dimensions in mm

## Mounting Brackets


## Vertical Mounting SA9Z-K01

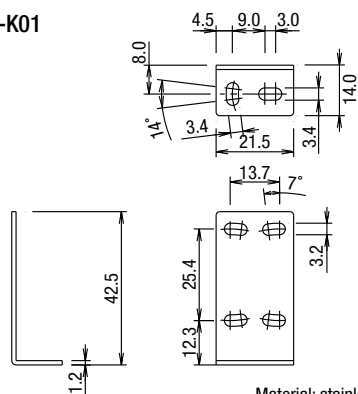


Material: stainless steel

## With Mounting Bracket

- \*1: Center of optical axis (through-beam)  
 \*2: Center of optical axis (polarized retro-reflective, diffuse reflective, and small-beam reflective models)

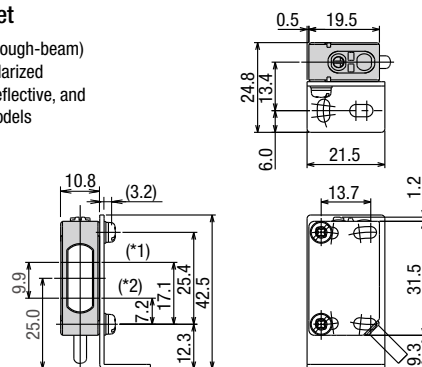


## Horizontal Mounting SA9Z-K02

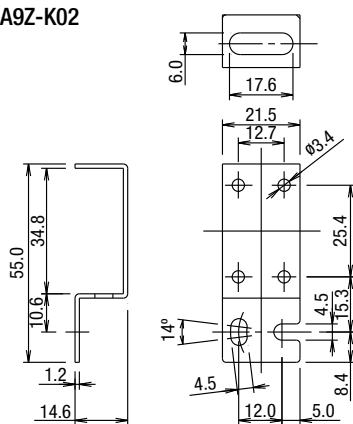


Material: stainless steel

## With Mounting Bracket

- \*1: Center of optical axis (through-beam)  
 \*2: Center of optical axis (polarized retro-reflective, diffuse reflective, and small-beam reflective models)

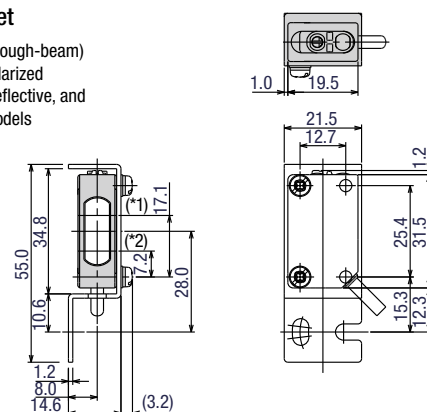


## Cover Model SA9Z-K03

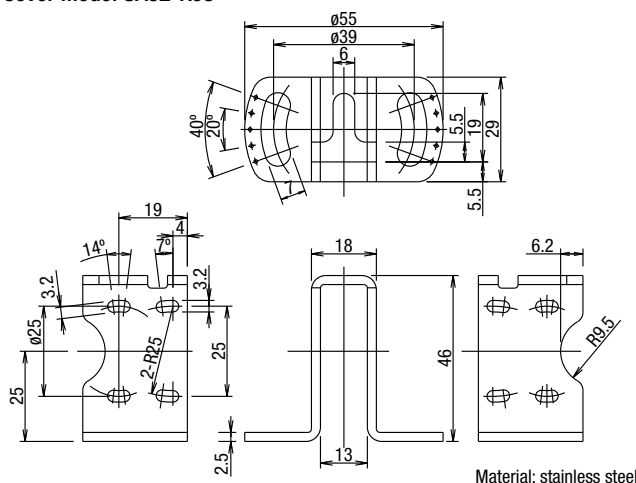


Material: stainless steel

## With Mounting Bracket

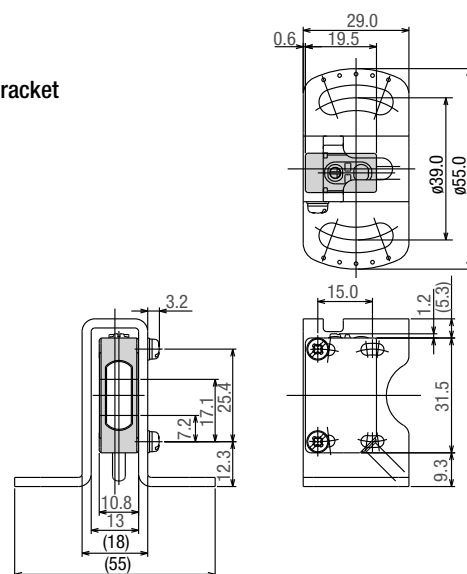


## Back Mounting SA9Z-K04



Material: Stainless Steel

## With Mounting Bracket




## Accessory Dimensions


All dimensions in mm

## Reflectors


IAC-R5

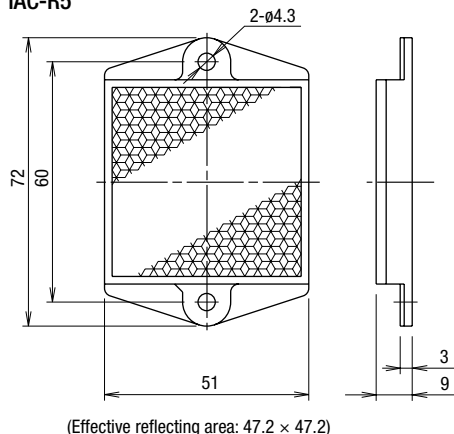


IAC-R6

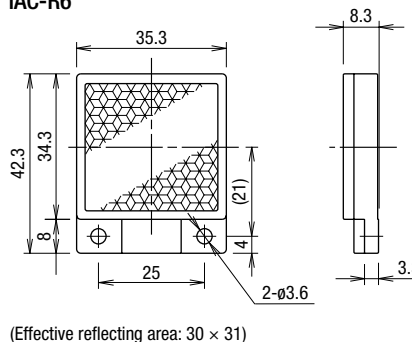


IAC-R8

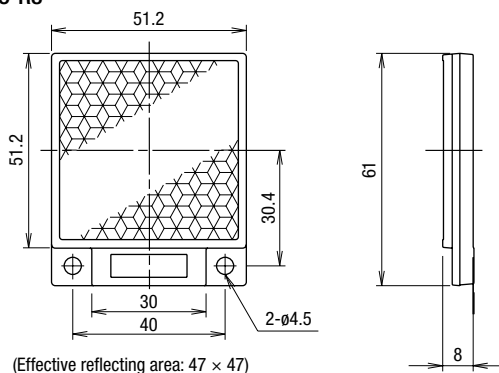


IAC-RS1




IAC-RS2

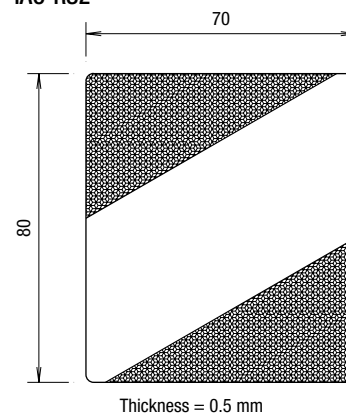


IAC-R7M (rear/side mounting)

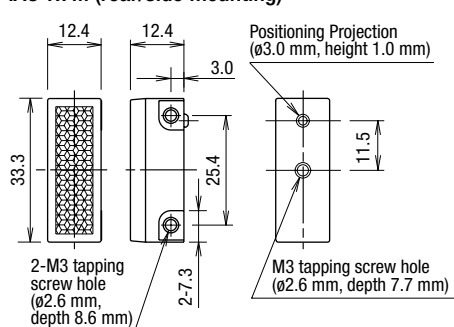

IAC-R7B (rear mounting)

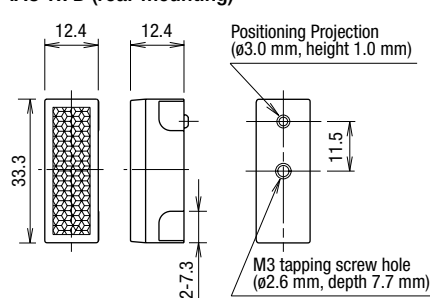


IAC-R7S (side mounting)




- Effective reflecting area: 8.6 × 29.5
- The mounting plate for reflector must be 0.8 to 2.5 mm in thickness.


IAC-R9

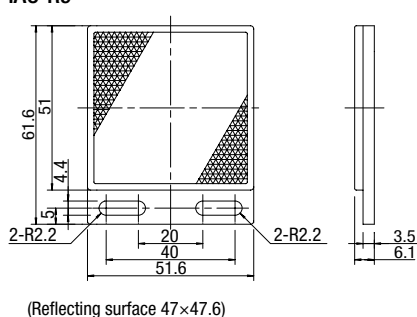

IAC-R10



IAC-R11




## Accessory Dimensions

**All dimensions in mm**


## Reflector Mounting Brackets

IAC-L2 (for IAC-R5)

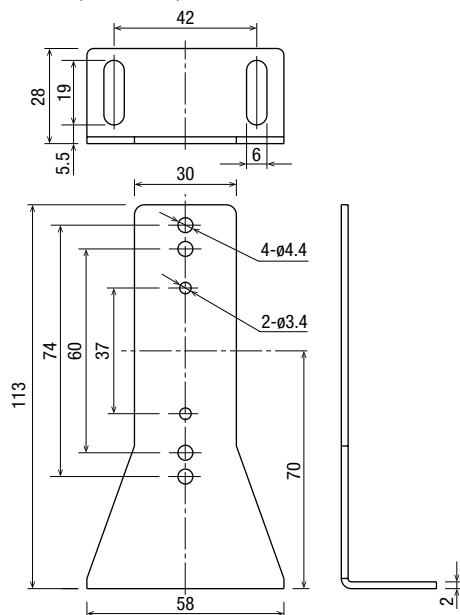


**Material:** SPCC (zinc chromate plating, black)

IAC-L3 (for IAC-R6)

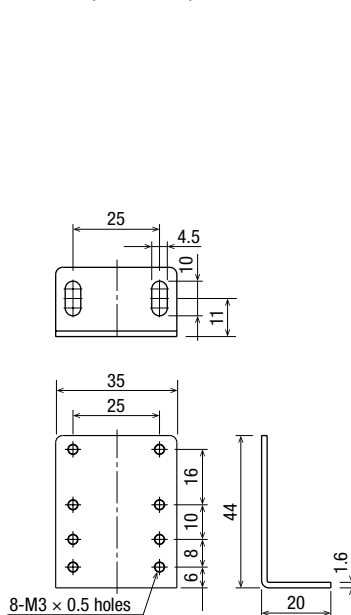

Material: SPCC (zinc plating)


IAC-L5 (for IAC-R8)

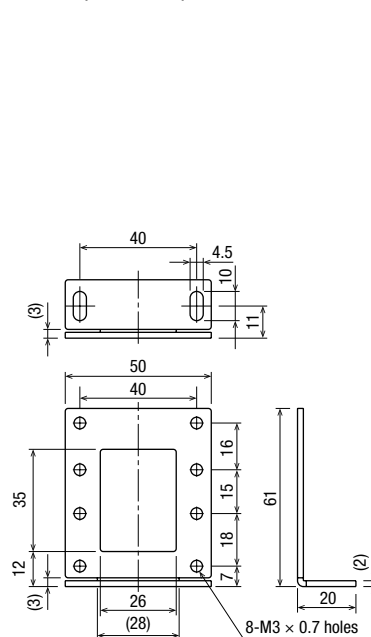

Material: SPCC (zinc plating)


**Connector Cable (connector on one end)**

**Straight**  
(SA9Z-CM8K-4S□)




Cable length:  
2 or 5m

Right-angle  
(SA9Z-CM8K-4L□)

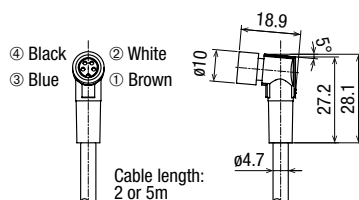

Cable length:  
2 or 5m


**Vertical Slit**  
SA9Z-S06  
SA9Z-S07  
SA9Z-S08



**Material:** Stainless Steel

Note: For slit width A, see **M-008**.


Horizontal Slit  
SA9Z-S09  
SA9Z-S10  
SA9Z-S11



**Material:** Stainless Steel

Note: For slit width A, see **M-008**.


Round Slit  
SA9Z-S12  
SA9Z-S13  
SA9Z-S14



- Dielectric strength when installed on the SA1E: 1000V AC (between live part and mounting bracket, except between live part and tightening ring)


## Air Blower Mounting Block

SA9Z-A02

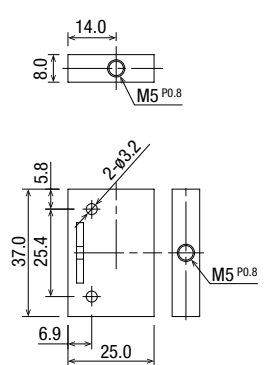

(Material: Anodized aluminum surface)

### With Mounting Bracket

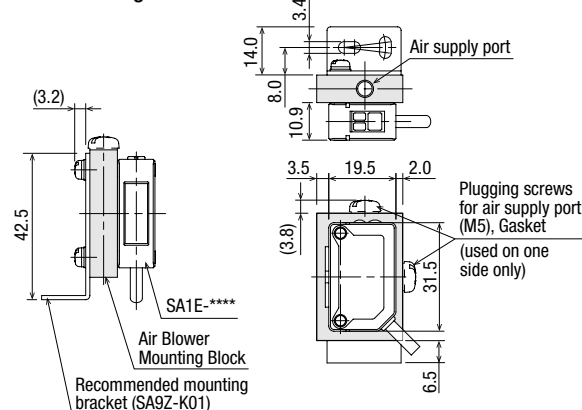


- The SA9Z-A02 air blower mounting block is supplied with two mounting screws (M3 × 20 mm sems screws), one screw for plugging the air supply port (M5 × 6 mm), and one gasket for plugging the air supply port.
- An air tube fitting (M5) can be installed to either the top or side. Tighten the fitting to a torque of 0.5 N·m maximum.
- The air tube fitting and mounting bracket are not supplied and must be ordered separately (recommended mounting bracket: SA9Z-K01).



## Operating Instructions

### Indicator and Output Operation (except for background suppression model)

- The operation LED turns on (yellow) when the control output is on.



- The stable LED turns on (green) either at stable incident or stable interruption. Make sure to use the photoelectric switch after the stable operation is ensured.
- In the light ON operation, the output turns on when the receiving light intensity level is 1.0 or over as shown on the right.
- In the dark-ON operation, the output turns on when the receiving light intensity level is 1.0 or less as shown on the right.

	Receiving Light Intensity Level	Light Receiving Status	Stable LED (green)	Operation LED (yellow)/Control Output	
				Light ON	Dark ON
Operation Level	1.2 and over	Stable Incident	ON	ON	OFF
	1.0	Unstable Incident	OFF	ON	OFF
	0.8 and below	Stable Interruption	ON	OFF	ON

### Optical Axis Alignment (Light ON)

#### Through-beam

Fasten the receiver temporarily. Place the projector to face the receiver. Move the projector up, down, right and left to find the range where the operation LED turns on. Fasten the projector in the middle of the range. Next, move the receiver up, down, right and left in the same manner and fasten in the middle of the range where the operation LED turns on. Make sure that stable LED turns on at stable incident and stable interruption.

#### Polarized retro-reflective

Install the reflector perpendicularly to the optical axis. Move the SA1E photoelectric switch up, down, right and left to find the range where the operation LED turns on. Fasten the switch in the middle of the range. Polarized retro-reflective model can be installed also by finding the position where the reflection of projected red light is most intense, while observing the reflection on the reflector from behind the switch. Make sure that stable LED turns on at stable incident and stable interruption.

#### Diffuse-reflective/Small-beam reflective

Place the SA1E photoelectric switch where the switch can detect the object. Move the switch up, down, right and left to find the range where the operation LED turns on. Fasten the switch in the middle of the range. Make sure that stable LED turns on at stable incident and stable interruption. Because the light source element of small-beam reflective model is a red LED, visual inspection is possible as well.

### Sensitivity Adjustment

Referring to the table at right, adjust the sensitivity of the SA1E photoelectric switch when necessary, in such cases as the through-beam model is used to detect small or translucent objects or the reflective model is affected by background. The table explains the status of operation LED when the operation mode is set to light ON.

- After adjusting the sensitivity, make sure that stable LED turns on at stable incident and stable interruption. For detecting objects too small to turn on the stable LED, use an optional slit.

- Sensitivity is set to the maximum (+) at the factory before shipment. When adjusting the sensitivity, use the screwdriver supplied with the SA1E photoelectric switch to turn the control as shown below, to a torque of 0.05 N·m maximum.

Step	Photoelectric Switch Status	Sensitivity Control	Adjusting Procedure
1	Receiving light • Through-beam, polarized reflective: No object detected • Diffuse reflective, small-beam reflective: Object detected		Turn the control counter-clockwise to the minimum (−). Then turn clockwise (toward +) until the operation LED turns on (turns off with dark ON type) (point A).
2	Light is interrupted • Through-beam, polarized reflective: Object detected • Diffuse reflective, small-beam reflective: No object detected		At interruption status, turn the control clockwise (toward +) from point A, until the operation LED turns on (turns off with dark ON type) (point B). If the operation LED does not turn on (turn off with dark ON type) even though the control has reached the maximum (+), set the maximum position (+) as point B.
3	—		Set the middle point between point A and B as point C.

### Adjustment of Sensing Range for Background Suppression (BGS) Model

- When adjusting the sensing range, follow the instruction below.


Step	Distance Control	Adjusting Procedure
1		Install the photoelectric switch and the object firmly. Turn the control counterclockwise until the operation LED turns off (turns on with dark ON type). From this point, turn the control clockwise until the operation LED turns on (turns off with dark ON type) (point A).
2		Remove the object, and confirm that the operation LED turns off (turns on with dark ON type). Turn the control clockwise until the operation LED turns on (detecting the background) (turns off with dark ON type) (point B). (Note 1)
3		Set the middle point between point A and B as point C. (Note 2)

Note 1: When the background is far off and not detected, turn the control 360°, and set the point as point C.

Note 2: Because the control is multi-turn, it may take more than one turn to move from point A to point B.

Note 3: Turning the control clockwise lengthens the sensing distance.

Note 4: Background suppression (BGS) model is not provided with a stable LED.

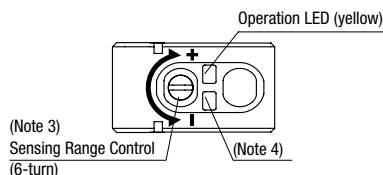

## Operating Instructions

### Power Supply and Wiring

- Do not use the SA1E photoelectric switch at the transient status immediately after turning on the power (approx. 100 ms, background suppression model: 200 ms). When the load and switch use different power supplies, make sure to power up the switch first.
- Use a power supply with little noise and inrush current, and use the photoelectric switch within the rated voltage range. Make sure that ripple factor is within the allowable limit. Do not apply AC voltage, otherwise the switch may blow out or burn.
- When using a switching power supply, make sure to ground the FG (frame ground) terminal, otherwise high-frequency noise may affect the photoelectric switch.
- Turn power off before inserting/removing the connector on photoelectric switch. Make sure that excessive mechanical force is not applied to the connector. Connect the connector cable to a tightening torque of 0.5 N·m maximum.
- To ensure the degree of protection, use the applicable connector cable for the connector model. Connector cables are ordered separately.
- Avoid parallel wiring with high-voltage or power lines in the same conduit, otherwise noise may cause malfunction and damage. When wiring is long, use a separate conduit for wiring.
- Use a cable of 0.3 mm<sup>2</sup> minimum core wires, then the cable can be extended up to 100m.

### Installation

#### Installing the Photoelectric Switch

- Do not install the SA1E photoelectric switches in an area where the switches are subject to the following conditions, otherwise malfunction and damage may be caused.
  - \* Inductive devices or heat source
  - \* Extreme vibration or shock
  - \* Large amount of dust
  - \* Water, oil, chemicals
  - \* Outdoor
- Make sure to prevent sunlight, fluorescent light, and especially the fluorescent light of inverters from entering the receiver of the photoelectric switch directly. Keep the through-beam model receiver away from intense extraneous light.
- Interference prevention allows two SA1E switches to be mounted in close proximity. However, the through-beam model is not equipped with interference prevention. Maintain appropriate distance between the switches referring to the lateral displacement characteristics.
- Because the SA1E photoelectric switches are IP67 waterproof, the SA1E can be exposed to water. However, wipe water drops and smears from the lens and slit using a soft cloth to make sure of the best detecting performance.
- Polycarbonate or acrylic resins are used for optical elements. Do not use ammonia or caustic soda for cleaning, otherwise optical elements will be dissolved. To remove dust and moisture build-up, use soft dry cloth.
- Tighten the mounting screws (M3) to a torque of 0.5 N·m. Do not tighten the mounting screws excessively or hit the switch with a hammer, otherwise the protection degree cannot be maintained.

#### Installing the Reflector


- Use M4 mounting screws for the IAC-R5 and IAC-R8 reflector, and M3 mounting screws for the IAC-R6 reflector. Tighten the mounting screws to a tightening torque of 0.5 N·m maximum. Mounting screws are not supplied with the switch.
- Use the M3 self-tapping screw, flat washer, and spring washer to tighten the IAC-R7 reflector to a torque of 0.5 to 0.6 N·m.
- Optional reflector mounting bracket IAC-L2 is not supplied with mounting screws or nuts.
- IAC-L3 and IAC-L5 are supplied with mounting screws for mounting the reflector on the bracket.
- Reflector IAC-RS1 and IAC-RS2 can be installed directly on a flat surface using the adhesive tape attached to the back of the reflector. Before attaching the reflector, clean the board surface to ensure secure attachment.

#### Installing the air blower mounting block SA9Z-A02

- When installing the SA9Z-A02 on the SA1E photoelectric switch, use the attached M3 × 20 mounting screws and tighten to a torque of 0.5 N·m maximum.
- Do not use the mounting screw (M3 × 12) supplied with the mounting bracket (SA9Z-K01) to mount the SA1E photoelectric switches.
- The SA9Z-A02 cannot be used with the through-beam slits (SA9Z-S06 to S14).
- The air tube fitting (M5) can be installed to either the top or side. The air tube is not supplied.
- Close the unused port using the air supply port plugging screw and gasket (supplied with SA1E) to a tightening torque of 1 to 2 N·m maximum. The recommended air pressure is 0.1 to 0.3 MPa.

#### Installing the background suppression (BGS) model

- This sensor can detect objects correctly when the sensor head is installed perpendicular to the moving object. Install the sensor head as shown below to minimize sensing errors.

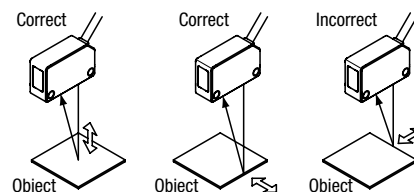

- If the sensor is used in a place subject to a large variations in the ambient temperature, the characteristics may change depending on the target object. Be sure to check the operation under the actual operating conditions.