

KVT

Split cable glands




1.12

IP54

Advantages & benefits

- Insertion of pre-terminated cables
- Warranty on pre-terminated cables remains
- Retrofits, repairs and maintenance can be done much more easily and quickly
- High cable density, wide variety of grommets
- Suitable for metric cut-outs
- Locknut is included

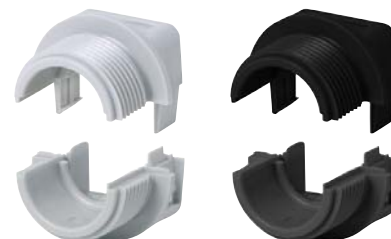

Specifications

Material	Polycarbonate (PC)
Colour	grey (similar RAL 7035) black
Flame class	UL94-Vo, self-extinguishing
IP rating	IP54, with gasket and correct selection of the cable grommets (certified acc. to EN 60529)
UL type rating	UL type 12 (acc. to UL 50E)
Temperature	- 30°C to + 100°C (static)
Properties	Halogen-free, silicone-free
Cut-out dimension	Metric sizes

Accessories

Cable grommets	48 - 52
KVT-EMC Brackets	141
Locknuts	188 - 189
ST Plugs	53

Description	Type	Order No.	Grommets small large	Thread Thread length	PU
	KVT 50 2	45204 45030	2 -	M50 x 1.5 Length: 14 mm	5
	KVT 50 2 + KGM-SUB-D25	45206 45031	2 -	M50 x 1.5 Length: 14 mm	5
	KVT 63 1	45212 45112	- 1	M63 x 1.5 Length: 14 mm	5
	KVT 63 4	45215 45115	4 -	M63 x 1.5 Length: 14 mm	5

* Only valid for grey product types