KEL-DPZ-B

Cable entry plates











Also available with threaded bushings.



Membrane on front

Product description

The KEL-DPZ-B entry plates are designed for routing cables without connectors.

The assembly of the KEL-DPZ-B with cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane and push the cables through. The KEL-DPZ-B provides strain relief and protection IP66 / UL type 12.

With an area of only 46×46 mm, up to 25 cables can be easily routed and sealed.

ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

Advantages & benefits

- Space saving shape
- Dual sealing of cables acc. to IP66/UL type 12
- High cable density
- Fast and easy assembly
- Hygienic design

Specifications

Material	Frame: Polyamide (PA)
	,

Sealing plate: Elastomer
Colour grey (similar RAL 7035)

■ black

Flame class

IP rating

UL94-Vo, self-extinguishing

IP 66 (certified acc. to EN 60529)

UL type rating

UL type 12 (acc. to UL 50E)

Temperature

- 40°C to + 90°C (static)

Properties

Halogen-free, silicone-free


Cut-out dimensions

46 × 46 mm / page 218 - 219

Plate depth 10 mm

Accessories

ST-B Plugs 85 FP Flanged plates 178 - 183

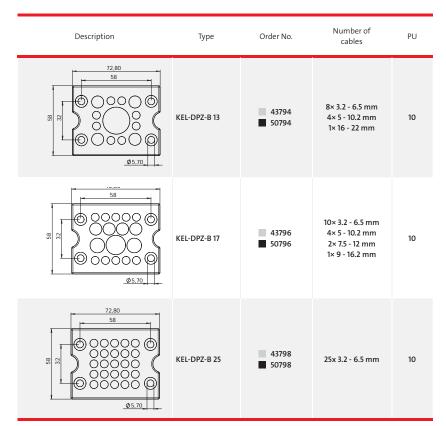

^{*} Only valid for grey product types