

E-Xtreme® – C-TYPE lever version

Housings, hoods and covers – 2 levers – with gasket

size **104.27**
2 000 hrs resistance
in salt-spray tests

Aggressive Environments

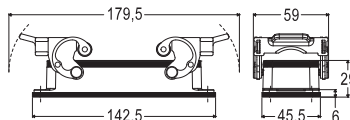
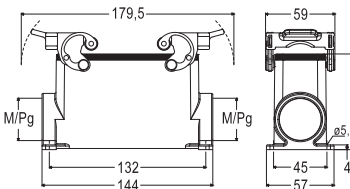
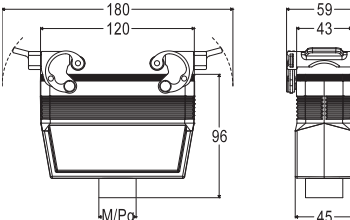


CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHIE 24		
	Surface mounting housings, 2 levers and gasket, high construction	MAPE 24.32	M32	
	Hoods, 2 levers and gasket, top entry, high construction, with metal adapter	MAVE 24 G32	M32	
	Covers, 2 levers and gasket	CHCE 24 G		
	For enclosures with 4 pegs without gasket with loop for hoods 			

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	24 + ⊕	B.41	CSS 16 A	24 + ⊕	B.121	MIXO modules	C.12-93
CCE 16 A	24 + ⊕	B.47	CT / CTSE* 16 A	24 + ⊕	B.129,133	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	24 + ⊕	B.55,61	CT / CTS* 10 A	64 + ⊕	B.139,141		
CSHT 16 A	24 + ⊕	B.68	CMCE / CMSH 16 A	10 + 2 (aux.) + ⊕	B.146,151		
CQE / CQEQ 16 A	46 + ⊕	B.75,85	CX 100 A/16 A	8/0 and 6/6 + ⊕	B.156-157		
CQEE 16 A	64 + ⊕	B.79	CX / CXC 80 A/16 A	4/8 + ⊕	B.161-162		
CD 10 A	64 + ⊕	B.91	*can be used only in bulkhead mounting housings				
CDD 10 A	108 + ⊕	B.97					
CDSH 10 A	42 + ⊕	B.105					

Accessories:


CHCP 24
Dust protection
cover
Page G.46

CR LCK
Locking
device
Page G.43