

C-TYPE series

Housings and hoods – 2 levers – with gasket

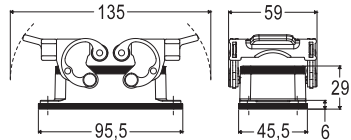
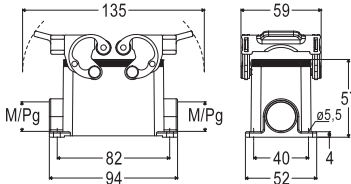
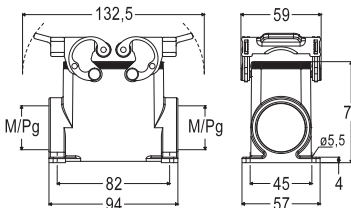
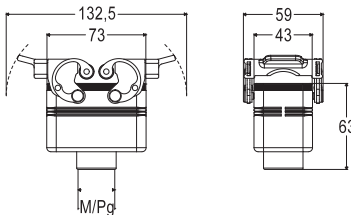
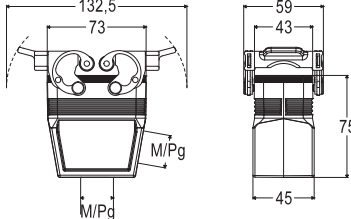
size **57.27**Heavy-Duty
Applications

CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

C[®]ALUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHI 10		
	Surface mounting housings, 2 levers and gasket	MHP 10.20 MHP 10.220 CHP 10 CHP 10.2	M20 M20 × 2 Pg 16 Pg 16 × 2	
	Surface mounting housings, 2 levers and gasket, high construction To be used only with a complete cable gland	MAP 10.25 MAP 10.225 MAP 10.32 MAP 10.232 MAP 10.40 MAP 10.240 CAP 10.21 CAP 10.221 CAP 10.29 CAP 10.229	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2 Pg 21 Pg 21 × 2 Pg 29 Pg 29 × 2	
	Hoods, 2 levers and gasket, top entry	Top entry MHV 10 G25 CHV 10 G	M25 Pg 16	
	Hoods, 2 levers and gasket, side or top entry, high construction To be used only with a complete cable gland	Side entry MFO 10 G40	Top entry MFV 10 G25 MFV 10 G32 MFV 10 G40 CFV 10 G CFV 10 G29	

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ⊕ B.39	CT / CTSE*	16 A	10 + ⊕ B.127,131
CCE	16 A	10 + ⊕ B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ⊕ B.144,149
CSH / JSH S	16 A	10 + ⊕ B.53,59	CX	40 A/10 A	8/24 + ⊕ B.170-171
CSHT	16 A	10 + ⊕ B.66	*can be used only in bulkhead mounting housings		
CQE / CQEY	16 A	18 + ⊕ B.73,83			
CDD	10 A	42 + ⊕ B.95			
CDSH	10 A	18 + ⊕ B.103			
CSS	16 A	10 + ⊕ B.119			
			MIXO Modular Inserts	Pages	
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95

Accessories:

 **CHCP 10**
Dust protection
cover
Page G.46

 **CR LCK**
Locking
device
Page G.43