

Central lever series

Hoods with central lever

size **104.27**Heavy-Duty
Applications

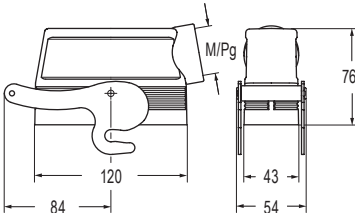
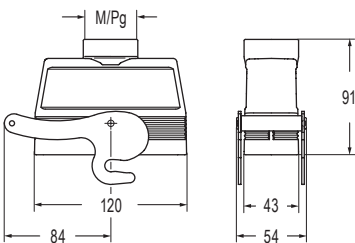


CE UK



EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, side entry, 1 central lever, without gasket	MAO 24 YX32 MAO 24 YX40 CAO 24 YX21 CAO 24 YX29	M32 M40 Pg 21 Pg 29	
	Hoods, top entry, 1 central lever, without gasket	MAV 24 YX32 MAV 24 YX40 CAV 24 YX21 CAV 24 YX29	M32 M40 Pg 21 Pg 29	
	Inclined hoods, side entry, 1 central lever, without gasket To be used only with a complete cable gland	MIO 24 YX40 MIO 24 YX50 CIO 24 YX36	M40 M50 Pg 36	
	Inclined hoods, top entry, 1 central lever, without gasket To be used only with a complete cable gland	MIV 24 YX40 MIV 24 YX50 CIV 24 YX36	M40 M50 Pg 36	

CENTRAL LEVER

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☺ B.41	CSS	16 A	24 + ☺ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☺ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☺ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☺ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☺ B.156-157		
CSHT	16 A	24 + ☺ B.68	CX / CXC	80 A/16 A	4/8 + ☺ B.161-162		
CQE / CQEY	16 A	46 + ☺ B.75,85					
CQEE	16 A	64 + ☺ B.79					
CD	10 A	64 + ☺ B.91					
CDD	10 A	108 + ☺ B.97					
CDSH	10 A	42 + ☺ B.105					

Accessories:


CR YLK24
Locking device
Page G.44

CR YLK24 SL
Locking device
Page G.44