

COB series – System for switch cabinet

Panel supports for multipole connectors

size **44.27 – 104.27**



Specialized
Applications



EN 60529	IP20
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500




ALUS ECBT2.E115072 | ECBT8.E115072

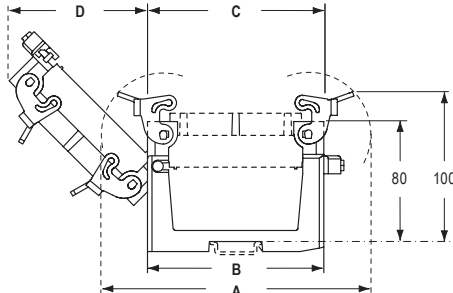Item	Description	Inserts size	Part No.	Dimension
	Connector carrier baseplate for mounting on DIN EN 60715 rail or fixed mounting using screws	44.27	COB 06 BC	
		57.27	COB 10 BC	
		77.27	COB 16 BC	
		104.27	COB 24 BC	


- kit comprising frame and mobile blocks, for insert coupling

Note:


It is the responsibility of the installer to verify the continuity of the PE protective earth circuit ⊕ between the two halves of the connector.

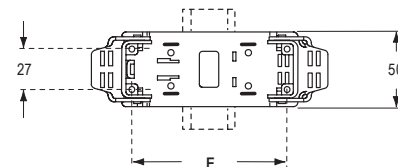

Part No.	A	B	C	D	E
44.27	120	91,5	58	50	44
57.27	133	91,5	71	59,5	57
77.27	153,5	91,5	91,5	74	77,5
104.27	180	118	118	93	104

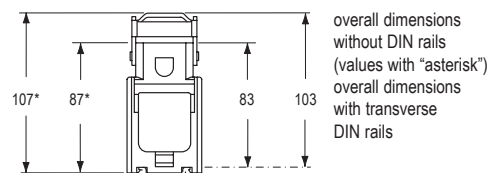

Panel cut-out **COB BC**



Inserts size 44.27 – 104.27	Poles	Pages
CNE 16 A	6 to 24 + ⊕	B.38-41
CCE 16 A	6 to 24 + ⊕	B.44-47
CSH / JSH S 16 A	6 to 24 + ⊕	B.52-55,58-61
CSHT 16 A	10 to 24 + ⊕	B.66-68
CQE / CQEY 16 A	10 to 46 + ⊕	B.72-75,82-85
CQEE 16 A	40 to 64 + ⊕	B.78-79
CD 10 A	40 to 64 + ⊕	B.90-91
CDD 10 A	24 to 108 + ⊕	B.94-97
CDSH / CDSH NC 10 A	9 to 42 + ⊕	B.102-105,108
CP / CPY 35 A	6 + ⊕	B.112,114

Inserts size 44.27 – 104.27	Poles	Pages
CSS 16 A	6 to 24 + ⊕	B.118-121
CMCE / CMSH 16 A	3 + 2 (aux.), 6 + 2 (aux.), 10 + 2 (aux.) + ⊕	B.144-146, 149-151
CX / CXC	combined inserts	B.156-171
MIXO Modular Inserts		Pages
MIXO modules		C.12-93
CX T (2 to 6-slot sized MIXO frames)		C.95

Accessories:



CR .. BPE
PE jumpers
Page E.292



COB L
Levers
Page E.292