

IL-BRID series

Housings and covers – 2 levers – with gasket


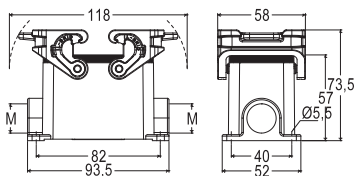
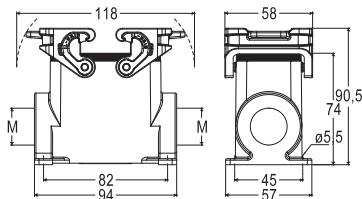


size **57.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CLI 10		
	Surface mounting housings, 2 levers and gasket	MLP 10.20 MLP 10.220	M20 M20 × 2	
	Surface mounting housings, 2 levers and gasket, high construction	MLAP 10.25 MLAP 10.225 MLAP 10.32 MLAP 10.232 MLAP 10.40 MLAP 10.240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Covers, 2 levers and gasket	CLC 10 G		
	For enclosures with 4 pegs without gasket with loop for hoods 			

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CT / CTSE*	16 A	10 + ☉ B.127,131
CCE	16 A	10 + ☉ B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CSH / JSH S	16 A	10 + ☉ B.53,59	CX	40 A/10 A	8/24 + ☉ B.170-171
CSHT	16 A	10 + ☉ B.66	*can be used only in bulkhead mounting housings		
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts		Pages
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95

Complete with:


Hoods
Page E.57,61

Covers
Page E.60