

IL-BRID series

Housings and covers – 2 levers – with gasket


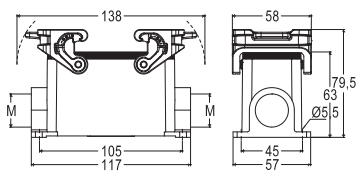
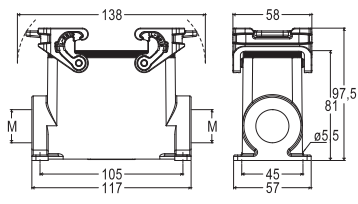


size **77.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CLI 16		
	Surface mounting housings, 2 levers and gasket	MLP 16.25 MLP 16.225	M25 M25 × 2	
	Surface mounting housings, 2 levers and gasket, high construction To be used only with a complete cable gland	MLAP 16.25 MLAP 16.225 MLAP 16.32 MLAP 16.232 MLAP 16.40 MLAP 16.240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Covers, 2 levers and gasket For enclosures with 4 pegs without gasket with loop for hoods 	CLC 16 G		

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	16 + ⊕	B.40	CP / CPY 35 A	6 + ⊕	B.112,114	MIXO modules	C.12-93
CCE 16 A	16 + ⊕	B.46	CSS 16 A	16 + ⊕	B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	16 + ⊕	B.54,60	CT / CTSE* 16 A	16 + ⊕	B.128,132		
CSHT 16 A	16 + ⊕	B.67	CT / CTS* 10 A	40 + ⊕	B.138,140		
CQE / CQEY 16 A	32 + ⊕	B.74,84	CMCE / CMSH 16 A	6 + 2 (aux.) + ⊕	B.145,150		
CQEE 16 A	40 + ⊕	B.78	CX / CXC 80 A/16 A	4/0, 4/2 + ⊕	B.158-160		
CD 10 A	40 + ⊕	B.90	CX 40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ⊕	B.163-164, 168-169		
CDD 10 A	72 + ⊕	B.94					
CDSH 10 A	27 + ⊕	B.104					

*can be used only in bulkhead mounting housings

Complete with:

Hoods
Page E.65,69Covers
Page E.68