
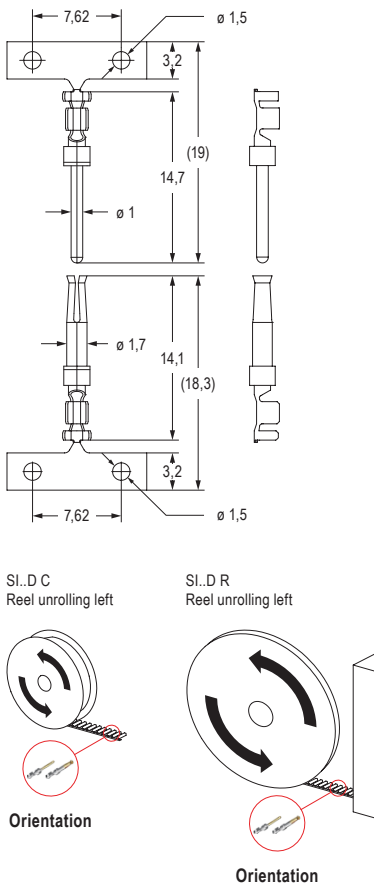


Contact resistance	≤ 10 mΩ
Mechanical life (cycles)	
- SI..1D	≥ 500
- SI..2D	≥ 250
- SI..3D	≥ 50

CAUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Part No.	Dimension
	5 A crimp contacts (loose parts) 1 packaging unit: 200 pcs.	Male	Female	
	section (mm ²) section (AWG)			
	0,08-0,21 28-24	 SIM1D 0.2	SIF1D 0.2	
	0,08-0,21 28-24	 SIM2D 0.2	SIF2D 0.2	
	0,08-0,21 28-24	 SIM3D 0.2	SIF3D 0.2	
	0,21-0,52 24-20	 SIM1D 0.5	SIF1D 0.5	
	0,21-0,52 24-20	 SIM2D 0.5	SIF2D 0.5	
	0,21-0,52 24-20	 SIM3D 0.5	SIF3D 0.5	
	5 A crimp contacts (coil package) 1 packaging unit: 500 pcs.			
	section (mm ²) section (AWG)			
	0,08-0,21 28-24	 SIM1D 0.2C	SIF1D 0.2C	
	0,08-0,21 28-24	 SIM2D 0.2C	SIF2D 0.2C	
	0,08-0,21 28-24	 SIM3D 0.2C	SIF3D 0.2C	
	0,21-0,52 24-20	 SIM1D 0.5C	SIF1D 0.5C	
	0,21-0,52 24-20	 SIM2D 0.5C	SIF2D 0.5C	
	0,21-0,52 24-20	 SIM3D 0.5C	SIF3D 0.5C	
	5 A crimp contacts (reel package) 1 packaging unit: 10.000 pcs.			
	section (mm ²) section (AWG)			
	0,08-0,21 28-24	 SIM1D 0.2R	SIF1D 0.2R	
	0,08-0,21 28-24	 SIM2D 0.2R	SIF2D 0.2R	
	0,08-0,21 28-24	 SIM3D 0.2R	SIF3D 0.2R	
	0,21-0,52 24-20	 SIM1D 0.5R	SIF1D 0.5R	
	0,21-0,52 24-20	 SIM2D 0.5R	SIF2D 0.5R	
	0,21-0,52 24-20	 SIM3D 0.5R	SIF3D 0.5R	
SIM1D/SIF1D and SIM3D/SIF3D crimp contacts are available on request				
Loose parts recommended crimping tool: SIPZ W				
Coil package recommended crimping tool: SIPZC W				
Reel package recommended crimping tool: suitable for stripping / crimping automated machines to be used with 10 000 pieces reels, see pages F.53 for 5 A crimp contacts.				

Materials

Contacts	copper alloy, selective gold  plated
----------	---

Inserts**Pages**

CQ 21	6,5 A	A.12
MIXO modules	5 A and 4 A	C.50-51,59-60,65,79