

CCE 16

16 A 500 V

size **77.27**

16 poles +

Crimp connection

EN 61984 rating	16 A 500 V 6 kV 3
	16 A 400 / 690 V 6 kV 2
Rated voltage (UL / CSA)	600 V
Insulation resistance	≥ 10 GΩ
Contact resistance	≤ 1 mΩ
Ambient temperature limit	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK EAC


ECBT2.E115072 | ECBT8.E115072
PVVA2.E506437 | PVVA8.E506437

Item	Description	Part No.	Dimension
	Male inserts for male contacts Without contacts (to be ordered separately)	CCEM 16	
	Female inserts for female contacts Without contacts (to be ordered separately)	CCEF 16	
	16 A advanced opening contacts section (mm ²) section (AWG) 0,5 20 0,75 18 1 18 1,5 16 2,5 14	Male CC 0.5 AN CC 0.7 AN CC 1.0 AN CC 1.5 AN CC 2.5 AN	
	16 A crimp contacts section (mm ²) section (AWG) 0,14-0,37 26-22 0,5 20 0,75 18 1 18 1,5 16 2,5 14 3 12 4 12	Female CCMA 0.3 CCMA 0.5 CCMA 0.7 CCMA 1.0 CCMA 1.5 CCMA 2.5 CCMA 3.0 CCMA 4.0	
	16 A crimp contacts (gold plating) section (mm ²) section (AWG) 0,14-0,37 26-22 0,5 20 0,75 18 1 18 1,5 16 2,5 14 3 12 4 12	CCMD 0.3 CCMD 0.5 CCMD 0.7 CCMD 1.0 CCMD 1.5 CCMD 2.5 CCMD 3.0 CCMD 4.0	

Wiring information, CC contacts

conductor section (mm ²)	conductor slot ø A (mm)	stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3,0	2,55	7,5
4,0	2,85	7,5

Wire diameter: up to 4,7 mm.

For basic or high thickness gold plating, please refer to page F.13.

It is recommended to use the crimping tools and removal tools homologated by ILME (please see page F.23)

Materials

Insert	polycarbonate (PC)
UL 94 flame rating	V-0
Colour	pebble grey, RAL 7032
Contacts	copper alloy, silver ● and gold ● plated




CR CPQ

Coding pins
Page G.3

Enclosures size 77.27

Pages

Heavy-Duty Applications	
Metallic with C-TYPE lever	E.62-69
Metallic with IL-BRID lever	E.96-99,106
Metallic with JEI®-P lever	E.115-116,119
Metallic with V-TYPE IP67 lever	E.126,132-133
Thermoplastic T-TYPE	E.230-231,234-235
Aggressive Environments	
Metallic IP68 high protection	E.146-147
Metallic W-TYPE	E.158-159,164
Metallic E-Xtreme®	E.178-179,186-187,196
Thermoplastic T-TYPE/W	E.230-231,234-235
Specialized Applications	
EMC (Electromagnetic Shielding)	E.212-213,218
Hygienic series for food and beverage	E.246,248
Standard applications with Central lever	E.258-259
BIG Enclosures for multiple cable entries	E.270,276-277
COB system for switch cabinet	E.286-289
Light and Sound applications with JEI®-P lever	E.300-301

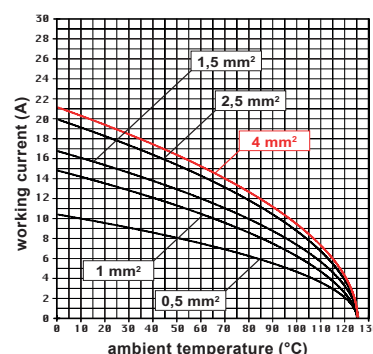

CCE 16 inserts max. current load derating diagram