

Central lever series

Housings and hoods with 2 pegs for central levers


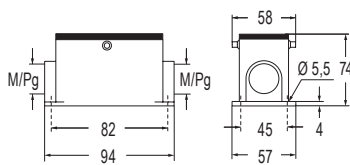

size **57.27**Heavy-Duty
Applications

EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 pegs and gasket	CHI 10 YC		
	Surface mounting housings, 2 pegs and gasket, high construction, 2 entries	MAP 10 YC232 CAP 10 YC229	M32 × 2 Pg 29 × 2	
	Hoods, top entry, 2 pegs and gasket, high construction To be used only with a complete cable gland	MFV 10 GYC25 MFV 10 GYC32 MFV 10 GYC40 CFV 10 GYC21 CFV 10 GYC29	M25 M32 M40 Pg 21 Pg 29	

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CT / CTSE*	16 A	10 + ☉ B.127,131
CCE	16 A	10 + ☉ B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CSH / JSH S	16 A	10 + ☉ B.53,59	CX	40 A/10 A	8/24 + ☉ B.170-171
CSHT	16 A	10 + ☉ B.66	*can be used only in bulkhead mounting housings		
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts		Pages
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95