

EMC series – C-TYPE lever version

size **57.27**

Housings and covers – 2 levers – with gasket

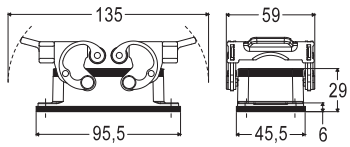
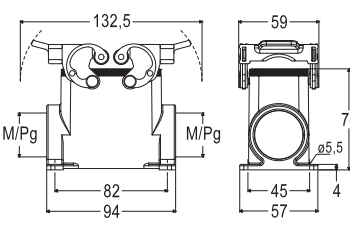


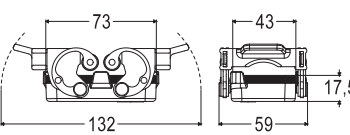
Specialized
Applications

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHIS 10		
	Surface mounting housings, 2 levers and gasket, high construction	MAPS 10.32 CAPS 10.21	M32 Pg 21	
	Covers, 2 levers and gasket	CHCS 10 G		
	For enclosures with 4 pegs without gasket with loop for hoods 			

EMC

E

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CT / CTSE*	16 A	10 + ☉ B.127,131
CCE	16 A	10 + ☉ B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CSH / JSH S	16 A	10 + ☉ B.53,59	CX	40 A/10 A	8/24 + ☉ B.170-171
CSHT	16 A	10 + ☉ B.66	*can be used only in bulkhead mounting housings		
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts	Pages	
			MIXO modules	C.12-93	
			CX 03 T (3-slot sized MIXO frames)	C.95	

Complete with:

Hoods
Page E.211

Accessories:

CHCP 10
Dust protection
cover
Page G.46