

Thermoplastic – CK / MK

Housings – 1 lever




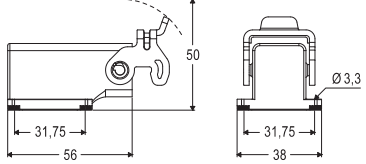
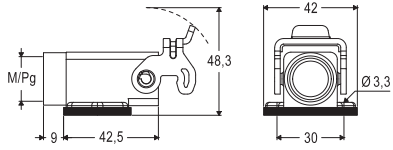

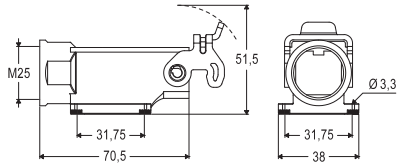
size **21.21**Heavy-Duty
Applications

EN 60529	IP44
With CKR 65	IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12
With CKR 65	Type 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK

(pending: CQC, DNV and BV)

(pending: cURus)

Item	Description	Light grey	Jet black	Entry	Dimension
	Bulkhead mounting housings, 1 lever	CK 03 I	CK 03 IN		
	Angled bulkhead mounting housings, 1 lever Not suitable for CQ4 series inserts	CK 03 IA	CK 03 IAN		
	Angled bulkhead mounting housing, 1 lever, fixing by 4 screws	CK 03 IA4	CK 03 IA4N		
	Angled bulkhead mounting housings, 1 lever, with <u>open bottom flange</u> , with cable entry Not suitable for CQ4 series inserts	MK IAP20 CK 03 IAPS	MK IAPN20 CK 03 IAPNS	M20 Pg 11	
	Angled bulkhead mounting housing, 1 lever, with <u>open bottom flange</u> , M25 cable entry, fixing by 4 screws	MK IAP25	MK IAPN25	M25	

Compact 21.21 Inserts	Poles	Pages
CQ4 / CQ / CQY	40 A to 6,5 A	A.4-12
CK / JK / CKSH	10 A	A.16-19
CD / CDY	10 A	A.22-23
CD / CDY	10 A	A.24-25
CJ (RJ45)	1 A to 2,1 A	A.30-33
CUK (USB)	–	A.36
CX (BUS)	10 A	A.37
CLK (Fibre optics)	–	A.38

Note: to obtain the IP66 / IP67 / IP69 degree of protection it is necessary to replace the fixing screw supplied with all inserts, with the one with gasket included in the CKR 65 kit, to be purchased separately, except for the inserts listed below (already supplied with a fixing screw with gasket):

- CQF/M 07, CQF/M 12
- CJ KF
- CJK 8FT / 8IFT
- CUK 2FT / 3FT
- CX 1/2 BDF/M
- CLK 04 SCF / SCF-H / SCM

Accessories:



CKR 65
gasket and screw kits for
IP66 / IP67 / IP69
Page A.67