

CX 02 PD

Thermoplastic docking frames

2-slot sized

EN 60529 rating	IP2X (IPXXB)
UL 50 / UL 50E	
Ambient temperature limit	-40 °C ... +125 °C
Mechanical life when fitted with MIXO modules (cycles)	≥ 500

(pending: CQC, DNV and BV)

(pending: cURus)

Item	Description	Part No.	Dimension
------	-------------	----------	-----------




Float-mount thermoplastic insulating docking frame for 2 modular units


[CX 02 PDM](#)

* supplied with 2× floating washers to enable the frame to be float-mounted using standard M4 fixing screws (not supplied)

The leading centring system compensates for tolerances of ± 2 mm both in x and y axes.

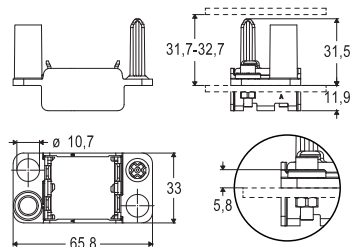


Panel cut-out




Fixed-mount thermoplastic insulating docking frame for 2 modular units

[CX 02 PDF](#)

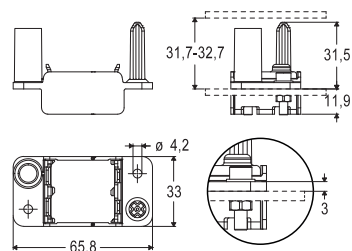


Panel cut-out



Materials

Frame	polycarbonate (PC)
UL 94 flame rating	V-0
Colour	pebble grey, RAL 7032



CX 01 PEF/PEM

1-slot sized PE module
for thermoplastic docking frames
Page C.27