

CX 03 PD


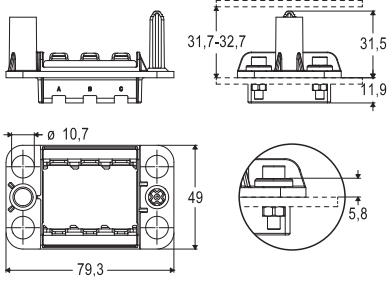

Thermoplastic docking frames


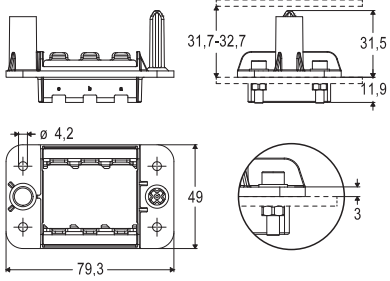

3-slot sized

EN 60529 rating	IP2X (IPXXB)
UL 50 / UL 50E	
Ambient temperature limit	-40 °C ... +125 °C
Mechanical life when fitted with MIXO modules (cycles)	≥ 500

(pending: CQC, DNV and BV)


(pending: cURus)

Item	Description	Part No.	Dimension
	Float-mount thermoplastic insulating docking frame for 3 modular units * supplied with 4× floating washers to enable the frame to be float-mounted using standard M4 fixing screws (not supplied) The leading centring system compensates for tolerances of ± 2 mm both in x and y axes.	CX 03 PDM	 Panel cut-out 

	Fixed-mount thermoplastic insulating docking frame for 3 modular units	CX 03 PDF	 Panel cut-out 
--	---	---------------------------	---

Materials

Frame	polycarbonate (PC)
UL 94 flame rating	V-0
Colour	pebble grey, RAL 7032



CX 01 PEF/PEM

1-slot sized PE module
for thermoplastic docking frames
Page C.27