CX 04 PD

Thermoplastic docking frames

4-slot sized

EN 60529 rating	**IP2X (IPXXB)**
UL 50 / UL 50E	**—**
Ambient temperature limit	**-40 °C ... +125 °C**
Mechanical life when fitted with MIXO modules (cycles)	**≥ 500**

(pending: CQC, DNV and BV)

(pending: cURus)

Item	Description	Part No.	Dimension
 *	Float-mount thermoplastic insulating docking frame for 4 modular units * supplied with 4× floating washers to enable the frame to be float-mounted using standard M4 fixing screws (not supplied) The leading centring system compensates for tolerances of ± 2 mm both in x and y axes.	CX 04 PDM	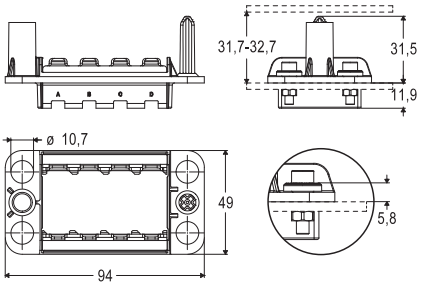 **Panel cut-out** 
	Fixed-mount thermoplastic insulating docking frame for 4 modular units	CX 04 PDF	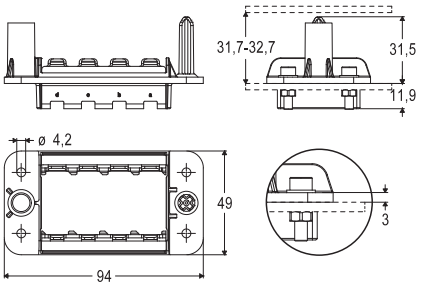 **Panel cut-out** 

Materials

Frame	polycarbonate (PC)
UL 94 flame rating	V-0
Colour	pebble grey, RAL 7032



CX 01 PEF / PEM
1-slot sized PE module
for thermoplastic docking frames
Page C.27

dimensions shown in mm are not binding and may be changed without notice