



Special enclosures – T-BOX

Branch coupling

size **44.27 – 57.27**
**Heavy-Duty
Applications**


EN 60529	IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C


CALUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Dimension						
	Branch-off T-BOX coupling for:	CYG 06H06							
	<ul style="list-style-type: none">- 2 hoods with 1 lever and gasket size 44.27 on both sides- 1 bulkhead housing size 44.27 on front								
	Branch-off T-BOX coupling for:	CYG 06H10							
	<ul style="list-style-type: none">- 2 hoods with 1 lever and gasket size 44.27 on both sides- 1 bulkhead housing size 57.27 on front								
		<table><tr><td>Part No.</td><td>X</td></tr><tr><td>CYG 06H06</td><td>70</td></tr><tr><td>CYG 06H10</td><td>83</td></tr></table>	Part No.	X	CYG 06H06	70	CYG 06H10	83	
Part No.	X								
CYG 06H06	70								
CYG 06H10	83								
* M4 tap processing is required for proper attachment									

	Branch-off T-BOX coupling to be fitted in DIN rails for:	CYG 06H06D							
	<ul style="list-style-type: none">- 2 hoods with 1 lever and gasket size 44.27 on both sides- 1 bulkhead housing size 44.27 on front								
	Branch-off T-BOX coupling to be fitted in DIN rails for:	CYG 06H10D							
	<ul style="list-style-type: none">- 2 hoods with 1 lever and gasket size 44.27 on both sides- 1 bulkhead housing size 57.27 on front								
		<table><tr><td>Part No.</td><td>X</td></tr><tr><td>CYG 06H06D</td><td>70</td></tr><tr><td>CYG 06H10D</td><td>83</td></tr></table>	Part No.	X	CYG 06H06D	70	CYG 06H10D	83	
Part No.	X								
CYG 06H06D	70								
CYG 06H10D	83								

How to use the CYG 06H branch coupling:

- The cables are branched off by using the CYG 06H coupling in the 1 or 2 branch-off versions.
- Multi-pole inserts 44.27 size can be fitted inside the two side recesses.
- The entire unit can be used with one lever hoods complete with connector inserts.
- The front faces can be fitted with 44.27 and/or 57.27 size bulkhead housings.
- The coupling may also be used as an adapter by using a combination of different insert versions.
- The CHC 06 LG cover may be used to close the coupling side faces.
- In the branch-offs, the CSS series dual spring terminal inserts allow two wires to be connected without having to fit additional terminals inside the coupling.

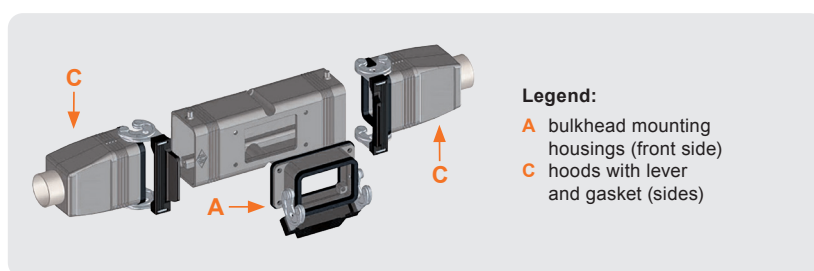

Complete with:

 Bulkhead enclosures C-TYPE Pages E.48,54,56	 Hoods C-TYPE Page E.48	 Cover C-TYPE Pages E.52
 IL-BRID Pages E.90,92,94	 IL-BRID Page E.91	 IL-BRID Pages E.90