


# Slim enclosures with IL-BRID lever

size **66.16**

Housings, hoods and covers – 1 lever




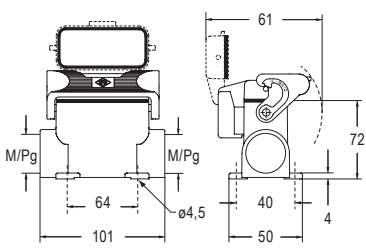

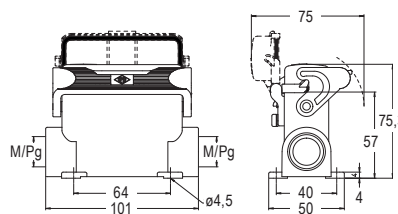

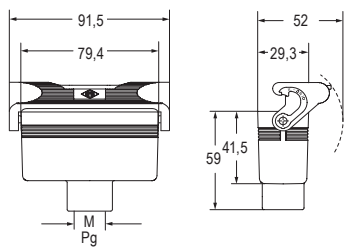



Heavy-Duty Applications 

CE UK

CCC DNV BUREAU VERITAS

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CAUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	With cover	Entry	Dimension
	Bulkhead mounting housings, 1 lever, without gasket, with or without metal cover or SIMPLEX self-closing plastic cover	<a href="#">CZI 25 L</a>	<a href="#">CZI 25 LS</a>  SIMPLEX cover  <a href="#">CZI 25 LSP</a>		
	Surface mounting housings, 1 lever, without gasket, with or without metal cover, high construction	<a href="#">MZAP 25 L25</a> <a href="#">MZAP 25 L225</a> <a href="#">CZAP 25 L</a> <a href="#">CZAP 25 L2</a> <a href="#">CZAP 25 L21</a> <a href="#">CZAP 25 L221</a>	<a href="#">MZAP 25 LS25</a> <a href="#">MZAP 25LS225</a> <a href="#">CZAP 25 LS</a> <a href="#">CZAP 25 LS2</a> <a href="#">CZAP 25 LS21</a> <a href="#">CZAP 25LS221</a>	M25 M25 × 2 Pg 16 Pg 16 × 2 Pg 21 Pg 21 × 2	
	Surface mounting housings, 1 lever, without gasket, with SIMPLEX self-closing plastic cover, high construction		<a href="#">MZAP 25LSP20</a> <a href="#">MZAP 25LSP25</a> <a href="#">CZAP 25LSP16</a> <a href="#">CZAP 25LSP21</a>	M20 M25 Pg 16 Pg 21	
	Hoods, 1 lever, without gasket, top entry  To be used only with a complete cable gland	<a href="#">MZV 25 LG20</a> <a href="#">CZV 25 LG</a>		M20 Pg 16	
	Covers, 1 lever, without gasket  For enclosures with 2 pegs and gasket with loop for hoods 	<a href="#">CZC 25 LG</a>			

Inserts size 66.16	Poles	Pages
CDA 16 A	16 + ⊕	B.17
CDC 16 A	16 + ⊕	B.20
CSAH 16 A	16 + ⊕	B.25
CD 10 A	25 + ⊕	B.31
CDD 10 A	38 + ⊕	B.33

**Notes:**  
The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.

Enclosures with SIMPLEX self-closing cover ensure IP44 degree of protection when not mated and locked with lever.