

Slim enclosures – W-TYPE series

size **49.16**

Hoods and covers– 2 pegs



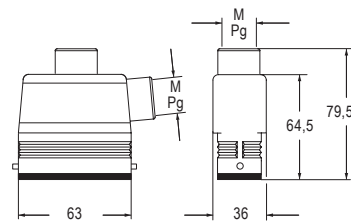

**Aggressive
Environments**

CE UK


EN 60529	IP65 / IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 pegs, with gasket, side entry	MZOW 15 L20 MZOW 15 L25 CZOW 15 L		M20 M25 Pg 16	
	Hoods, 2 pegs, with gasket, top entry		MZVW 15 L20 CZVW 15 L	M20 Pg 13,5	
	Hoods, 2 pegs, with gasket, side or top entry, high construction, with metal adapter	MZAOW 15 L25 CZAOW 15 L21	MZAVW 15 L25 CZAVW 15 L21	M25 Pg 21	
	Cover, 2 pegs and gasket Covers cannot be used together with metal coding pins For enclosures with 1 lever without gasket with eyelet for housings 		With eyelet CZCW 15 L		

W-TYPE

E

Inserts size 49.16		Poles	Pages
CDA	16 A	10 + ⊕	B.16
CDC	16 A	10 + ⊕	B.19
CSAH	16 A	10 + ⊕	B.24
CD	10 A	15 + ⊕	B.30

MIXO Modular Inserts		Pages
MIXO modules		C.12-93
CX 01 T (1-slot sized MIXO frames)		C.94