

JEI®-P series

Housings and hoods – 2 levers – with gasket



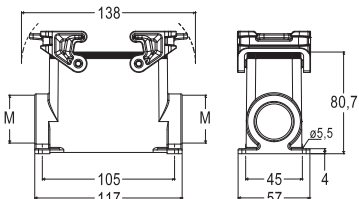

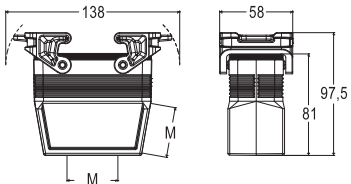
size **77.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

DNV BUREAU VERITAS (pending CQC)

CIRIUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	JPI 16		
	Surface mounting housings, 2 levers and gasket	JMPP 16.25 JMPP 16.225	M25 M25 × 2	
	Surface mounting housings, 2 levers and gasket, high construction To be used only with a complete cable gland	JMPAP 16.25 JMPAP 16.225 JMPAP 16.32 JMPAP 16.232 JMPAP 16.40 JMPAP 16.240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Hoods, 2 levers and gasket, top entry	Top entry JMPV 16 G32	M32	
	Hoods, 2 levers and gasket, side or top entry, high construction To be used only with a complete cable gland	Side entry Top entry JMPFV 16 G25 JMPFV 16 G32 JMPFO 16 G40 JMPFV 16 G40	M25 M32 M40	

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	16 + ⊕	B.40	CP / CPY 35 A	6 + ⊕	B.112,114	MIXO modules	C.12-93
CCE 16 A	16 + ⊕	B.46	CSS 16 A	16 + ⊕	B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	16 + ⊕	B.54,60	CT / CTSE* 16 A	16 + ⊕	B.128,132		
CSHT 16 A	16 + ⊕	B.67	CT / CTS* 10 A	40 + ⊕	B.138,140		
CQE / CQEY 16 A	32 + ⊕	B.74,84	CMCE / CMSH 16 A	6 + 2 (aux.) + ⊕	B.145,150		
CQEE 16 A	40 + ⊕	B.78	CX / CXC 80 A/16 A	4/0, 4/2 + ⊕	B.158-160		
CD 10 A	40 + ⊕	B.90	CX 40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ⊕	B.163-164, 168-169		
CDD 10 A	72 + ⊕	B.94					
CDSH 10 A	27 + ⊕	B.104					

*can be used only in bulkhead mounting housings

Complete with:

Hoods
Page E.65,69Covers
Page E.68