

JEI®-P series

Housings and hoods – 2 levers – with gasket


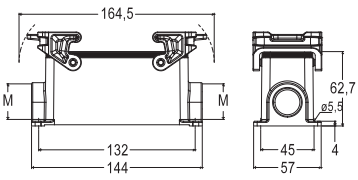
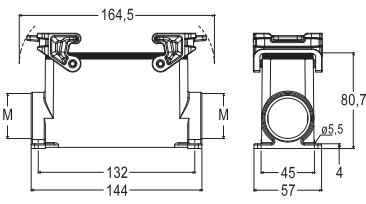
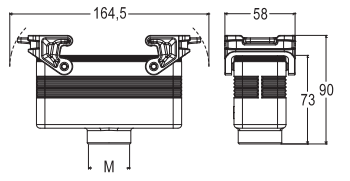
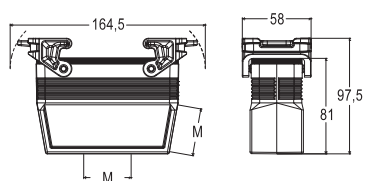
size **104.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	JPI 24		
	Surface mounting housings, 2 levers and gasket	JMPP 24.25 JMPP 24.225	M25 M25 × 2	
	Surface mounting housings, 2 levers and gasket, high construction To be used only with a complete cable gland	JMPAP 24.25 JMPAP 24.225 JMPAP 24.32 JMPAP 24.232 JMPAP 24.40 JMPAP 24.240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Hoods, 2 levers and gasket, top entry	Top entry JMPV 24 G32	M32	
	Hoods, 2 levers and gasket, side or top entry, high construction To be used only with a complete cable gland	Side entry JMPFV 24 G25 JMPFV 24 G32 JMPFO 24 G40 Top entry JMPFV 24 G40	M25 M32 M40	

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CT / CTSE*	16 A	24 + ☉ B.129,133	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CT / CTS*	10 A	64 + ☉ B.139,141		
CSHT	16 A	24 + ☉ B.68	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151		
CQE / CQEY	16 A	46 + ☉ B.75,85	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CQEE	16 A	64 + ☉ B.79	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CD	10 A	64 + ☉ B.91	*can be used only in bulkhead mounting housings				
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Complete with:

Hoods
Page E.73,77Covers
Page E.76