

E-Xtreme® – V-TYPE lever version

size **57.27**

Housings – 2 levers – with gasket

3 000 hrs resistance
in salt-spray tests

Aggressive
Environments


EN 60529	IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C*
with silicone gasket (on request)	-60 °C ... +125 °C*
Mechanical life (cycles)	≥ 500

*(>125 °C up to 180 °C with RY inserts)


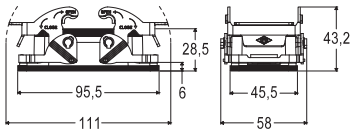

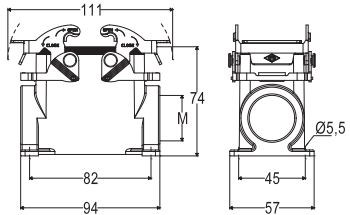
CE UK

BUREAU
VERITAS

(pending: CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket Optional mounting frame CG .. FL is available to ensure water tightness for bulkhead mounting housing when fitted onto a cabinet panel. (See page G.45)	C7IE 10		
	Surface mounting housings, 2 levers and gasket  2 000 hrs	M7PE 10.20 M7PE 10.220	M20 M20 × 2	
	Surface mounting housings, 2 levers and gasket, high construction  2 000 hrs	M7APE 10.32 M7APE 10.232 M7APE 10.40 M7APE 10.240	M32 M32 × 2 M40 M40 × 2	

Inserts size 57.27				Inserts size 57.27				180 °C Inserts size 57.27			
		Poles	Pages			Poles	Pages			Poles	Pages
CNE	16 A	10 + ☉	B.39	CT / CTSE*	16 A	10 + ☉	B.127,131	CNE RY**	16 A	10 + ☉	I.6
CCE	16 A	10 + ☉	B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉	B.144,149	** >125 °C up to 180 °C			
CSH / JSH S	16 A	10 + ☉	B.53,59	CX	40 A/10 A	8/24 + ☉	B.170-171				
CSHT	16 A	10 + ☉	B.66	*can be used only in bulkhead mounting housings							
CQE / CQEY	16 A	18 + ☉	B.73,83								
CDD	10 A	42 + ☉	B.95	MIXO Modular Inserts				Pages			
CDSH	10 A	18 + ☉	B.103	MIXO modules				C.12-93			
CSS	16 A	10 + ☉	B.119	CX 03 T (3-slot sized MIXO frames)				C.95			