

Central lever series

Hoods with central lever

size **57.27**
**Heavy-Duty
Applications**

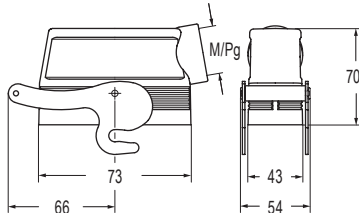
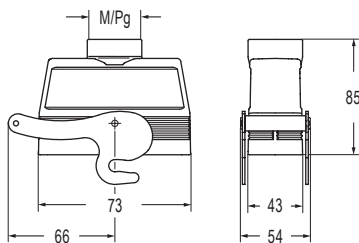

CE UK



EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, side entry, 1 central lever, without gasket	MAO 10 YX32 MAO 10 YX40 CAO 10 YX21 CAO 10 YX29	M32 M40 Pg 21 Pg 29	
	Hoods, top entry, 1 central lever, without gasket	MAV 10 YX32 MAV 10 YX40 CAV 10 YX21 CAV 10 YX29	M32 M40 Pg 21 Pg 29	

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CCE	16 A	10 + ☉ B.45	CX	40 A/10 A	8/24 + ☉ B.170-171
CSH / JSH S	16 A	10 + ☉ B.53,59			
CSHT	16 A	10 + ☉ B.66			
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts		Pages
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95