

E-Xtreme® – C-TYPE lever version

Hoods and covers – 4 pegs – without gasket

size **104.27**
2 000 hrs resistance
in salt-spray tests

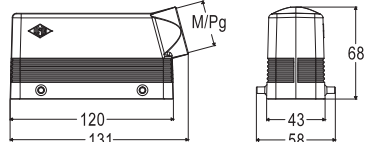
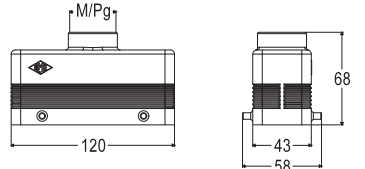
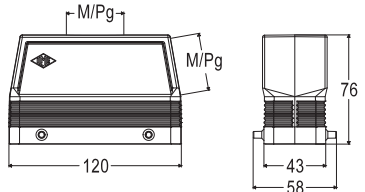


Aggressive
Environments


EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 4 pegs, side entry, high construction	MHOE 24.25 MHOE 24.32		M25 M32	
	Hoods, 4 pegs, top entry, high construction To be used only with a complete cable gland		MHVE 24.25 MHVE 24.32	M25 M32	
	Hoods, 4 pegs, side or top entry, high construction To be used only with a complete cable gland	MFOE 24.32 MFOE 24.40	MFVE 24.32 MFVE 24.40	M32 M40	
	Covers, 4 pegs For enclosures with 2 levers and gasket with loop for hoods  or with eyelet for housings 	With loop CHCE 24	With eyelet CHCE 24 S		

E-Xtreme®

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☺ B.41	CSS	16 A	24 + ☺ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☺ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☺ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☺ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☺ B.156-157		
CSHT	16 A	24 + ☺ B.68	CX / CXC	80 A/16 A	4/8 + ☺ B.161-162		
CQE / CQEY	16 A	46 + ☺ B.75,85					
CQEE	16 A	64 + ☺ B.79					
CD	10 A	64 + ☺ B.91					
CDD	10 A	108 + ☺ B.97					
CDSH	10 A	42 + ☺ B.105					

Accessories:


CHCP 24
Dust protection
cover
Page G.46