

# E-Xtreme® – IP68 high protection version

size **57.27**

Housings, hoods and covers – Screw locking

3 000 hrs resistance  
in salt-spray testsAggressive  
Environments

EN 60529	IP66 / IP68 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
with silicone gasket (on request)	-60 °C ... +125 °C*
Mechanical life (cycles)	≥ 500

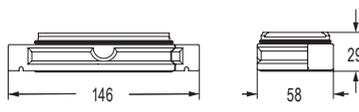
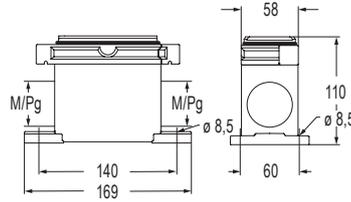
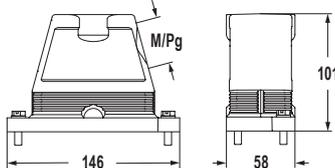
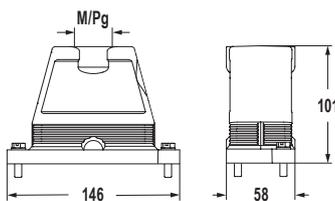

\*(&gt;125 °C up to 180 °C with RY inserts)

CE UK



C A US

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, screw locking  Optional mounting frame CG .. FL is available to ensure water tightness for bulkhead mounting housing when fitted onto a cabinet panel. (See page G.45)	<a href="#">CGIE 10</a>		
	Surface mounting housings, screw locking	<a href="#">MGPE 10.32</a>	M32	
	Hoods, side entry, screw locking	<a href="#">MGOE 10.25</a> <a href="#">MGOE 10.32</a>	M25 M32	
	Hoods, top entry, screw locking	<a href="#">MGVE 10.25</a> <a href="#">MGVE 10.32</a> <a href="#">MGVE 10.40</a>	M25 M32 M40	
	Covers, screw locking, for housings  With loop 	<a href="#">CGCE 10</a>		

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages	180 °C Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ⊕	CT / CTSE*	16 A	10 + ⊕	CNE RY**	16 A	10 + ⊕
CCE	16 A	10 + ⊕	CMCE / CMSH	16 A	3 + 2 (aux.) + ⊕			
CSH / JSH S	16 A	10 + ⊕	CX	40 A/10 A	8/24 + ⊕			
CSHT	16 A	10 + ⊕						
CQE / CQEY	16 A	18 + ⊕						
CDD	10 A	42 + ⊕						
CDSH	10 A	18 + ⊕						
CSS	16 A	10 + ⊕						
			<b>MIXO Modular Inserts</b>		<b>Pages</b>			
			MIXO modules		C.12-93			
			CX 03 T (3-slot sized MIXO frames)		C.95			

## Accessories:



**CGCP FX**  
Dust protection  
cover  
Page G.47



**CGCP MB**  
Dust protection  
cover  
Page G.47