

Slim enclosures with C-TYPE lever

Housings, hoods and covers – 2 levers

size **66.40**
**Heavy-Duty
Applications**



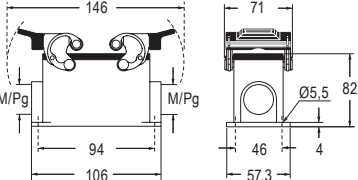
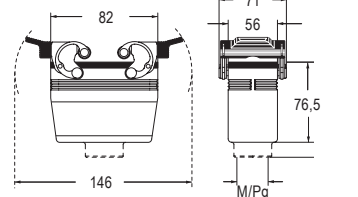


CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHI 50		
	Surface mounting housings, 2 levers and gasket	MHP 50.32 MHP 50.232 MHP 50.40 MHP 50.240 CHP 50.21 CHP 50.221 CHP 50.29 CHP 50.229	M32 M32 × 2 M40 M40 × 2 Pg 21 Pg 21 × 2 Pg 29 Pg 29 × 2	
	Hoods, 2 levers and gasket, top entry To be used only with a complete cable gland	MFV 50 G32 CFV 50 G29	M32 Pg 29	
	Covers, 2 levers and gasket For enclosures with 4 pegs without gasket with loop for hoods 	CHC 50 G		

Inserts size (66.16) × 2	Poles	Pages
CDA 16 A	32 + ⊕	B.18
CDC 16 A	32 + ⊕	B.21
CSAH 16 A	32 + ⊕	B.26
CD 10 A	50 + ⊕	B.32
CDD 10 A	76 + ⊕	B.34