



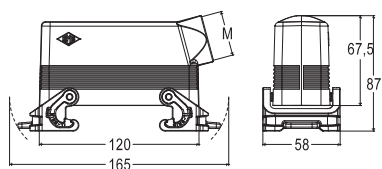

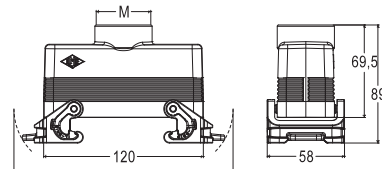

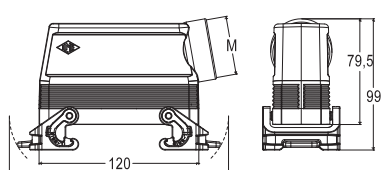

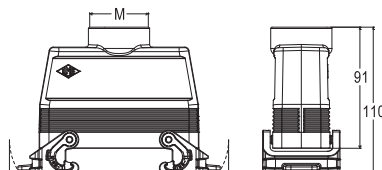
IL-BRID series

Hoods - 2 levers - without gasket

size **104.27**
Heavy-Duty Applications

CE UK
 (pending CQC)

 ECBT2.E115072 | ECBT8.E115072

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

Item	Description	Part No.	Entry	Dimension
	Hoods, 2 levers, without gasket, side entry	MLO 24 X25 MLO 24 X32	M25 M32	
	Hoods, 2 levers, without gasket, top entry	MLV 24 X25 MLV 24 X32	M25 M32	
	Hoods, 2 levers, without gasket, side entry, high construction	MLAO 24 X32 MLAO 24 X40	M32 M40	
	Hoods, 2 levers, without gasket, top entry, high construction	MLAV 24 X32 MLAV 24 X40	M32 M40	

IL-BRID

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ⊕ B.41	CSS	16 A	24 + ⊕ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ⊕ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ⊕ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ⊕ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ⊕ B.156-157		
CSHT	16 A	24 + ⊕ B.68	CX / CXC	80 A/16 A	4/8 + ⊕ B.161-162		
CQE / CQEY	16 A	46 + ⊕ B.75,85					
CQEE	16 A	64 + ⊕ B.79					
CD	10 A	64 + ⊕ B.91					
CDD	10 A	108 + ⊕ B.97					
CDSH	10 A	42 + ⊕ B.105					

Complete with:


Housings
Page E.74

Covers
Page E.76