

Slim enclosures – W-TYPE series

size **66.16**

Hoods and covers– 2 pegs



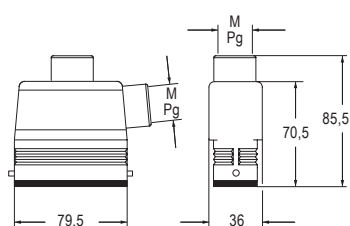


**Aggressive
Environments**

CE UK


EN 60529	IP65 / IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 pegs, with gasket, side entry	MZOW 25 L20 MZOW 25 L25 CZOW 25 L		M20 M25 Pg 16	
	Hoods, 2 pegs, with gasket, top entry To be used only with a complete cable gland		MZVW 25 L20 CZVW 25 L	M20 Pg 16	
	Hoods, 2 pegs, with gasket, side or top entry, high construction, with metal adapter	MZAOW 25 L25 CZAOW 25 L21	MZAVW 25 L25 CZAVW 25 L21	M25 Pg 21	
	Cover, 2 pegs and gasket Covers cannot be used together with metal coding pins For enclosures with 1 lever without gasket with eyelet for housings 		With eyelet CZCW 25 L		

W-TYPE

E

Inserts size 66.16		Poles	Pages
CDA	16 A	16 + ⊕	B.17
CDC	16 A	16 + ⊕	B.20
CSAH	16 A	16 + ⊕	B.25
CD	10 A	25 + ⊕	B.31
CDD	10 A	38 + ⊕	B.33