



HNM series – High Number of Mating cycles

Housings – 1 lever – with gasket

size **57.27**Specialized
Applications

CE UK


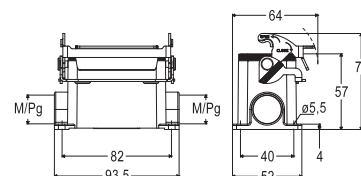
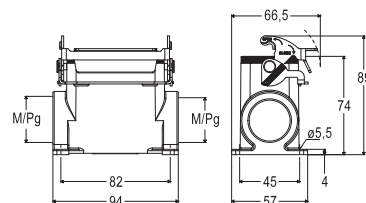
BUREAU
DNV VERITAS

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 10 000

CRAUS

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
------	-------------	----------	-------	-----------

Bulkhead mounting housings,
1 lever and gasket[RVI 10 L](#)Surface mounting housings,
1 lever and gasket[RVP 10 L20](#)
[RVP 10 L220](#)M20
M20 x 2Surface mounting housings,
1 lever and gasket,
high construction[RVAP 10 L32](#)
[RVAP 10 L232](#)M32
M32 x 2

Inserts size 57.27		Poles	Pages	MIXO Modular Inserts	Pages
RCE	16 A	10 + ⊕	H.11	MIXO HNM modules	H.38-60
RSH	16 A	10 + ⊕	H.15	RX 03 T (3-slot sized MIXO HNM frames)	H.62
RDD	10 A	42 + ⊕	H.23		
RDSH	10 A	18 + ⊕	H.27		

Accessories:**CR 10 DF**
Self-centring floating
frame HNM
Page H.64