



HNM series – High Number of Mating cycles

Housings – 1 lever – with gasket

size **104.27**Specialized
Applications


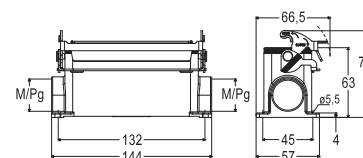
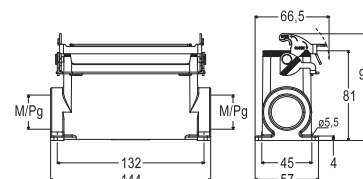
CE UK

DNV BUREAU
VERITAS

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 10 000

C[®]ALUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
------	-------------	----------	-------	-----------

Bulkhead mounting housings,
1 lever and gasket[RVI 24 L](#)Surface mounting housings,
1 lever and gasket[RVP 24 L25](#)
[RVP 24 L225](#)M25
M25 x 2Surface mounting housings,
1 lever and gasket,
high construction[RVAP 24 L32](#)
[RVAP 24 L232](#)M32
M32 x 2

Inserts size 104.27		Poles	Pages	MIXO Modular Inserts	Pages
RCE	16 A	24 + ⊕	H.13	MIXO HNM modules	H.38-60
RSH	16 A	24 + ⊕	H.17	RX 06 T (6-slot sized MIXO HNM frames)	H.62
RQEE	16 A	64 + ⊕	H.19		
RD	10 A	64 + ⊕	H.21		
RDD	10 A	108 + ⊕	H.25		
RDSH	10 A	42 + ⊕	H.29		
RXC	80 A / 16 A	4/8 + ⊕	H.31		

Accessories:**CR 24 DF**
Self-centring floating
frame HNM
Page H.64