

CONFIX™ FWS-B

Bulkhead fittings for direct conduit pickup

IP54

RoHS
compliant

Made in
Germany



Advantages & benefits

- Hinged cover
- Fast and easy installation
- Functional design
- Protection class IP54


Specifications

Material	Polycarbonate (PC)
Colour	grey (RAL 7011) black (RAL 9005)
IP rating	IP54
Flame class	UL94-V0, self-extinguishing
Temperature	-30°C to +100°C (static)
Properties	Halogen free, silicone free


Accessories

CONFIX WS conduits	290 - 291
Punches CONFIX	388 - 389


Type	Dimension*	Hole Ø [mm]	Size (A × B) [mm]	Cut-out (C × D) [mm]	Drill. Templ. (E × F) [mm]	Order No.	PU
CONFIX FWS-B 11	NW 13	3 × 4.3	49 × 45	22 × 22.6	29 × 37	31411 31410	10
CONFIX FWS-B 16	NW 17	3 × 4.3	49 × 45	22 × 22.6	29 × 37	31414 31413	10
CONFIX FWS-B 21	NW 23	3 × 6.6	67 × 63	37 × 28	41.5 × 51.5	31417 31416	10
CONFIX FWS-B 29	NW 29	4 × 6.6	85.5 × 76	41.9 × 40 r = 20	64.5 × 64.5	31420 31419	10
CONFIX FWS-B 36	NW 37	4 × 6.6	97 × 92	48.3 × 48.4 r = 24.2	79.5 × 79.5	31423 31422	5
CONFIX FWS-B 48	NW 50	4 × 6.6	111.5 × 100.5	53 × 60.5 r = 30.25	87.5 × 87.5	31426 31425	5



Size/Drilling template
FWS-B 11 to 21



Size/Drilling template
FWS-B 29 to 48

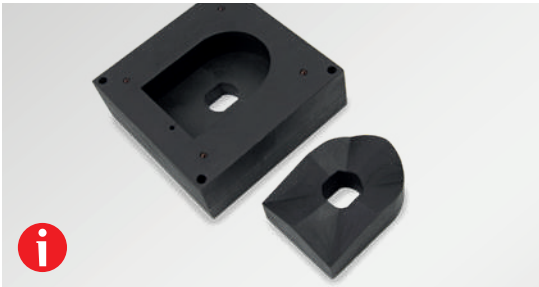

Matching sheet metal punches on p. 322



Grooved conduit clip



Fixed cover due to hinges

* For parallel corrugated cable protection conduit with dimension (NW)