


KEL-DP round

Cable entry plates with IP65 rating

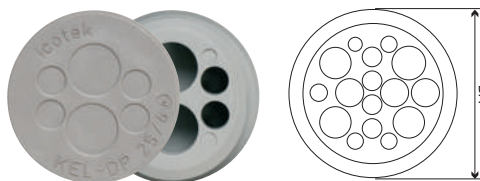

Type	Order No. Typ A	Order No. Typ B	Number of cables	Cut-out	External diameter DA	PU
KEL-DP 16 1 rund	■ 43600 ■ 50535	—	1× max. 9,2 mm	Ø 16 mm	23 mm	10
KEL-DP 16 3 rund	■ 43601	—	3× max. 5,2 mm	Ø 16 mm	23 mm	10
KEL-DP 16 7 rund	■ 43602	—	7× max. 3,2 mm	Ø 16 mm	23 mm	10
KEL-DP 20 1	■ 43571	—	1× max. 14 mm	Ø 20 mm	27 mm	10
KEL-DP 20 4	■ 43572	—	4× max. 5.2 mm	Ø 20 mm	27 mm	10
KEL-DP 20 4-1	■ 43575	—	2× max. 4.5 2× max. 8.0	Ø 20 mm	27 mm	10
KEL-DP 20 5	■ 43573	—	2× max. 3.6 mm 2× max. 4.6 mm 1× max. 10.6 mm	Ø 20 mm	27 mm	10
KEL-DP 20 9	■ 43574	—	4× max. 3.6 mm 5× max. 4.6 mm	Ø 20 mm	27 mm	10
KEL-DP 25 4	■ 43533 ■ 50533	■ 50536 ■ 43535	4× max. 8 mm	Ø 25 mm	32 mm	10
KEL-DP 25 6	■ 43531 ■ 50531	—	4× max. 5.2 mm 2× max. 9.4 mm	Ø 25 mm	32 mm	10
KEL-DP 25 7	■ 43534	—	7x max. 5.2 mm	Ø 25 mm	32 mm	10
KEL-DP 32 7	■ 43592	■ 43596	7x max. 8.0 mm	Ø 32 mm	38 mm	10
KEL-DP 32 10	■ 43532 ■ 50532	■ 43560 ■ 50560	6× max. 5.2 mm 2× max. 6.4 mm 2× max. 9.4 mm	Ø 32 mm	38 mm	10
KEL-DP 32 10-2	■ 43593	■ 43597	10x max. 6.4 mm	Ø 32 mm	38 mm	10
KEL-DP 32 11	■ 43594	■ 43598	9x max. 5.2 mm 2x max. 8.0 mm	Ø 32 mm	38 mm	10
KEL-DP 32 13	■ 43595	■ 43599	13x max. 5.2 mm	Ø 32 mm	38 mm	10

2
2.1
2.2
2.3
2.4
2.5
2.6
2.7
2.8