


ALU-LINE

LED lighting


with integrated socket



Type	Length	Rated power	Rated voltage	Luminous flux Light colour	Colour rendering index CRI	Socket	UL certified in progress	Order No.
ALU-LINE system luminaire EU	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	EU	—	81300
ALU-LINE system luminaire EU orange	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	EU orange	— NEW	81308
ALU-LINE system luminaire BE	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	BE	—	81301
ALU-LINE system luminaire CH	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	CH	—	81302
ALU-LINE system luminaire GB	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	GB	—	81303
ALU-LINE system luminaire EU with motion sensor	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	EU	—	81304
ALU-LINE system luminaire EU orange with motion sensor	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	EU orange	— NEW	81309
ALU-LINE system luminaire BE with motion sensor	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	BE	—	81305
ALU-LINE system luminaire CH with motion sensor	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	CH	—	81306
ALU-LINE system luminaire GB with motion sensor	350 mm	230 V AC	12 W	1350 lm 5600 K	> 80	GB	—	81307

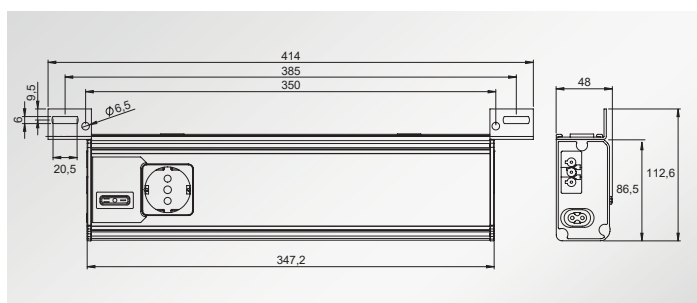

Version without motion sensor, with socket for door operated switch

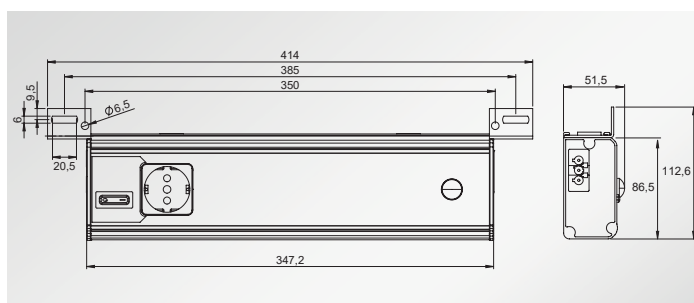

Version with motion sensor, without socket for door operated switch