


ALU-LINE

LED lighting


with and without integrated socket



Type	Length	Material	Rated voltage	Rated power	Luminous flux Light colour	Colour rendering index CRI	Socket	UL certified in progress	Order No.
ALU-LINE system luminaire US with motion sensor	350 mm	Aluminium, Polycarbonate	100 – 240 V AC	9 W	1280 lm 5600 K	> 80	US		81400
ALU-LINE system luminaire	350 mm	Aluminium, Polycarbonate	100 – 240 V AC	9 W	1280 lm 5600 K	> 80	—		81401
ALU-LINE system luminaire	200 mm	Aluminium, Polycarbonate	100 – 240 V AC	6 W	900 lm 5600 K	> 80	—		81402
ALU-LINE system luminaire US	350 mm	Aluminium, Polycarbonate	120 V AC	9 W	1280 lm 5600 K	> 80	US		81403
ALU-LINE system luminaire	200 mm	Aluminium, Polycarbonate	120 V AC	6 W	1280 lm 5600 K	> 80	—		81404

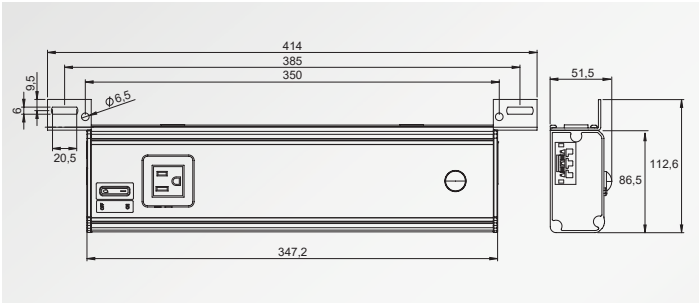

Version with US socket, with motion sensor,
without socket for door operated switch

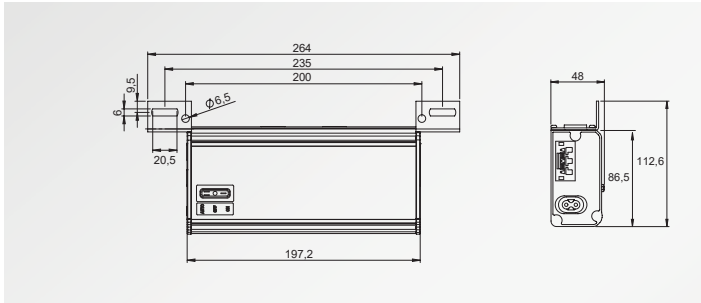

Short version without US socket, with socket for door operated switch

- 12
- 12.1
- 12.2
- 12.3
- 12.4