


MIX22 Luft-Luft-Wärmetauscher

Technische Daten	ME	MIX22BX0B	MIX22CX0B
spezifische Wärmeleistung	W/K	22	22
Versorgungsspannung	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Breite	mm	189	189
Höhe	mm	413	413
Tiefe	mm	149	149
Höchststrom	A	0,5	0,96
Sicherung T	A	1	2
Nennleistung	W	72	80
Einschaltdauer	-	100%	100%
Luftleistung Außenkreislauf	m³/h	280	280
Luftleistung Innenkreislauf	m³/h	280	280
Temperaturbereich	°C	-5 +55	-5 +55
Schutzart Innenkreislauf EN60529	-	IP54	IP54
Geräuschpegel	dB (A)	59	60
Gewicht	kg	7	7
Farbton	-	RAL 7035 gaufriert	
Konformität	-	CE	CE


Zubehör	
Thermostat 0-60°C, Schaltkontakt NO, 10A	AAFTO12
Thermostat 5-60°C, Wechselkontakt, 10A	AAWTS10
Ausführungen in Edelstahl	
Spezielle Farbe auf Anfrage	



Abmessungen

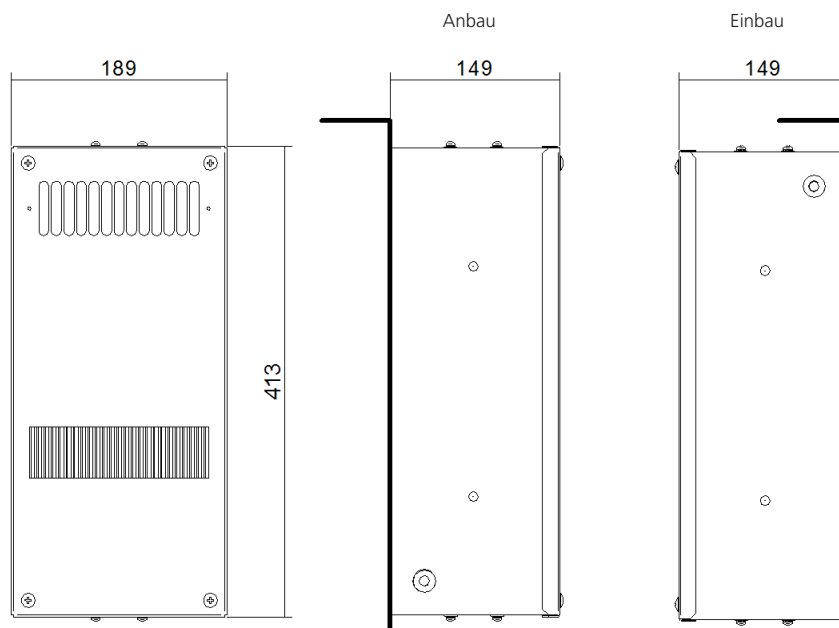

Leistungen

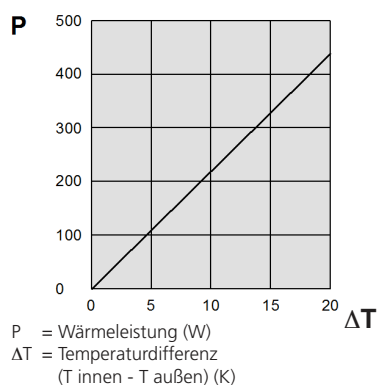


MIX22 Air-air heat exchangers

Characteristics	M.U.	MIX22BX0B	MIX22CX0B
Specific cooling power	W/K	22	22
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	189	189
Height	mm	413	413
Depth	mm	149	149
Max. current	A	0,5	0,96
Fuse T	A	1	2
Absorbed electric power	W	72	80
Duty cycle	-	100%	100%
External fan air flow	m³/h	280	280
Enclosure fan air flow	m³/h	280	280
Temperature limits	°C	-5 +55	-5 +55
Protection level EN60529 - enclosure side	-	IP54	IP54
Noise level	dB (A)	59	60
Weight	kg	7	7
Colour	-	RAL 7035 orange peel effect	
Conformity	-	CE	CE

Accessories/Options	
0-60°C thermostat, NO 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Stainless steel version	
Special paint on request	



Dimensions

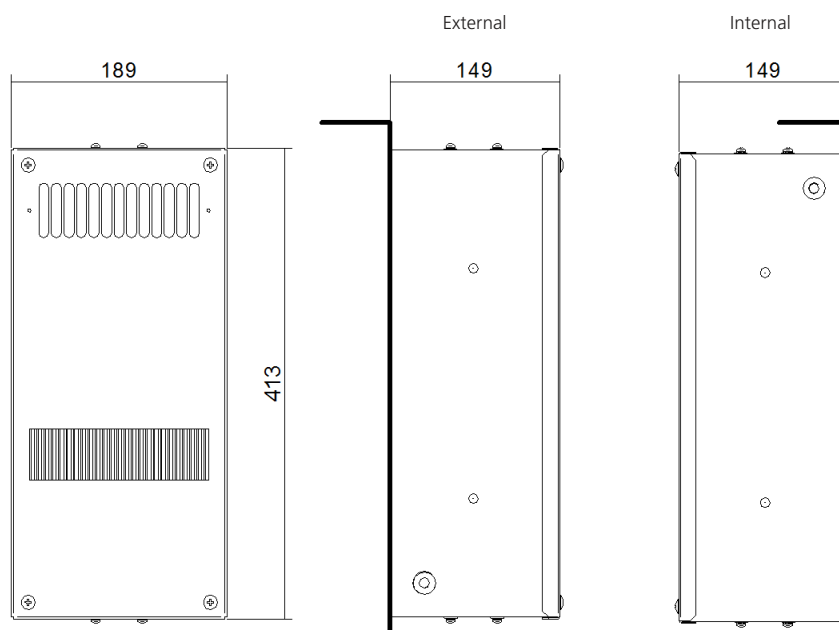

Performances

