

C-TYPE series

Housings – 1 lever – with gasket

size **104.62**
**Heavy-Duty
Applications**

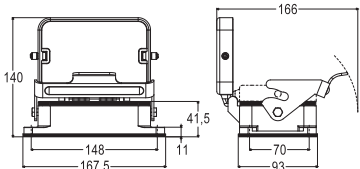


CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	With cover	Entry	Dimension
	Bulkhead mounting housings, 1 stainless steel rigid lever and gasket, with or without metal cover	CHI 48 L	CHI 48 LS		
	Surface mounting housings, 1 stainless steel rigid lever and gasket, with metal cover		MHP 48 LS40 MHP 48 LS50 CHP 48 LS29 CHP 48 LS	M40 × 2 M50 × 2 Pg 29 × 2 Pg 36 × 2	

Inserts size (104.27) × 2	Poles	Pages	Inserts size (104.27) × 2	Poles	Pages
CNE 16 A	48 + ⊕	B.43	CTSE* 16 A	48 + ⊕	B.135
CCE 16 A	48 + ⊕	B.49	CMCE / CMSH 16 A	10 + 2 (aux.) + ⊕	B.148,153
CSH / JSH S 16 A	48 + ⊕	B.57,63	*can be used only in bulkhead mounting housings		
CQE / CQEY 16 A	92 + ⊕	B.77,87			
CD 10 A	128 + ⊕	B.93			
CDD 10 A	216 + ⊕	B.99			
CDSH 10 A	84 + ⊕	B.107			
CSS 16 A	48 + ⊕	B.123			
			MIXO Modular Inserts		Pages
			MIXO modules		C.12-93
			CX 06 T (6-slot sized MIXO frames) × 2		C.95