



# 180 °C series – Heat shield enclosures

## Housings – 2 levers – with gasket

size **104.27**Specialized  
Applications

CE UK


DNV BUREAU  
VERITAS

|                            |                    |
|----------------------------|--------------------|
| EN 60529                   | IP65               |
| UL 50 / UL 50E             | Type 12 / 4        |
| Ambient temperature limits | -40 °C ... +180 °C |
| Mechanical life (cycles)   | ≥ 500              |

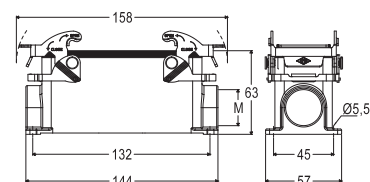

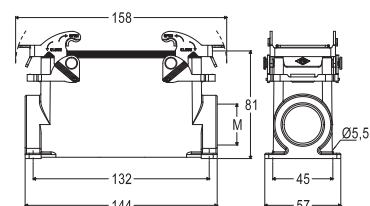

CIRIUS

ECBT2.E115072 | ECBT8.E115072

| Item | Description | Part No. | Entry | Dimension |
|------|-------------|----------|-------|-----------|
|------|-------------|----------|-------|-----------|

Bulkhead mounting housings,  
2 levers and gasket[CVIR 24](#)Surface mounting housings,  
2 levers and gasket[MVPR 24.25](#)

M25

Surface mounting housings,  
2 levers and gasket,  
high construction[MVAPR 24.32](#)  
[MVAPR 24.40](#)M32  
M40

| Inserts size 104.27 |             | Poles   | Pages |
|---------------------|-------------|---------|-------|
| CNE RY              | 16 A        | 24 + ⊕  | I.8   |
| CX RY               | 80 A / 16 A | 4/8 + ⊕ | I.13  |