

MIXO TWO – for 2 single MIXO modules

Housings – 1 lever

size 2 modules

Heavy-Duty
Applications


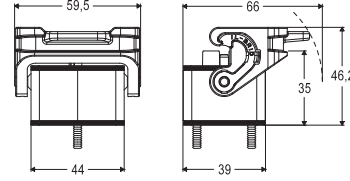

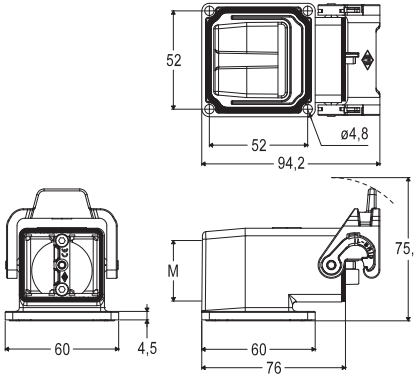
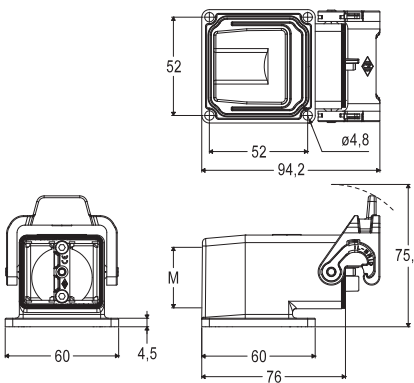


CE UK

EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending: CQC, DNV and BV)

(pending: cURus)

Item	Description	Part No.	Entry	Dimension
	Bulkhead metal mounting housings, 1 lever and gasket Supplied with frame with captive lock-in tabs	CXA 02 I		
	Angled bulkhead metal mounting housings, 1 lever and gasket, with <u>open bottom flange</u> with embedded gasket and closed rear Angled bulkhead metal mounting housings, 1 lever and gasket, with <u>open bottom flange</u> with embedded gasket and cable entry	CXA 02 IA MXA 02 IAP25 MXA 02 IAP32	M25 M32	
	Angled surface metal mounting housings, 1 lever and gasket, with <u>closed bottom flange</u> (without gasket) and cable entry	MXA 02 AP25 MXA 02 AP32	M25 M32	

Inserts	Pages
single-sized MIXO modular units	C.21-90