

MIXO ONE – for 1 single MIXO module

Housings, hoods and covers – 1 lever and 2 pegs

size **1 module**Heavy-Duty
Applications





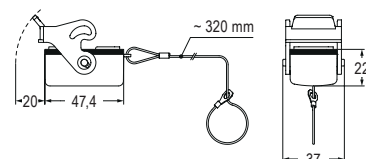



CE UK

DNV BUREAU
VERITAS

EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CFLUS

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, one lever and gasket	CXA 01 I		
	Hoods, 2 pegs, side or top entry (in 2 parts)	Side Entry MXA 01 O25	Top Entry MXA 01 V25	M25 
	Hoods, 2 pegs, top entry	MXA 01 V32	M32	
	Plastic covers, with 1 lever and gasket - with loop 	CXP 01 CLG		
	Plastic covers, with 2 pegs - with eyelet 	CXP 01 C		

Inserts	Pages
single-sized MIXO modular units	C.21-90

PE terminal: on both the bulkhead mounting housing and on the hood front part, PE screw terminal without protection plate, zinc plated steel terminal screw with rounded tip.
Connecting capacity: 0.5 mm² (20 AWG) - 10 mm² (8 AWG) both unprepared and prepared stranded copper wire.
PE terminal screw footprint: for Ph1 or 1.0x5.5 mm flat screwdriver, recommended torque 1.2 Nm (10.6 lb.in).

Some regulations may require conductor preparation with a crimped end sleeve. Recommended crimp shape: square, e.g. by using Rennsteig ferrule crimping pliers PEW 8.85 (610 1853).