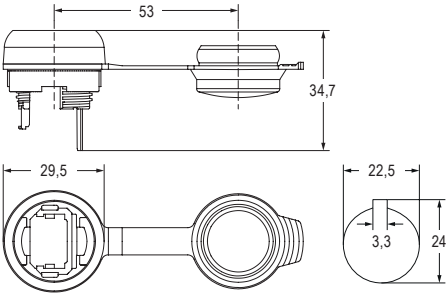


ATR

service interface

EN 60529	
(ATR C22 only)	IP65
Ambient temperature limit	-40 °C ... +70 °C

Item	Description	Part No.	Dimension
	Communication interface bulkhead IP65 To be completed with either one of the following products	ATR C22	
	RJ45 female /IDC connection Cat 6A, contact coding according T568A RJ45 IDC jack with coding according T568B or PROFINET on request	AT 8IFT	
	RJ45 female /female coupler Cat.6	AT 8FT	
	USB 2.0 coupler F-F Type A	AT U2F	
	USB 3.0 coupler F-F Type A	AT U3F	
	LC-Duplex multi-mode adapter	AT LCMM	
	LC-Duplex single-mode adapter	AT LCSM	

Materials	
Housing	polyamide (PA)
Nut	polyamide (PA)
UL 94 flame rating	V-0
Bulkhead protective cap	EPDM
Elastic band/seal	EPDM



CW..LC..

LC duplex patch cord for single-mode and multi-mode fibre optic

Page C.85