

C-TYPE series

Hoods – 4 pegs – without gasket

size **104.27**
**Heavy-Duty
Applications**

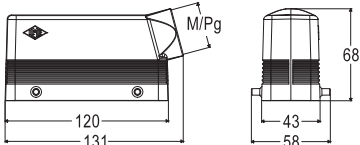
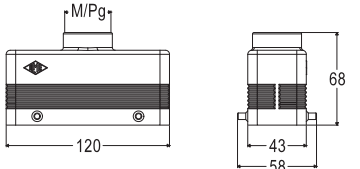

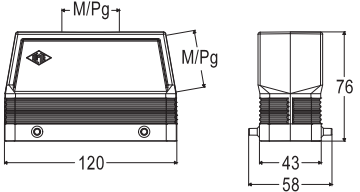
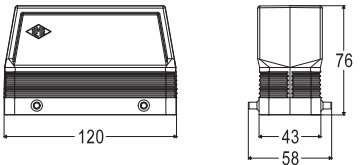

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



CE UK



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 4 pegs, without gasket, side entry	MHO 24.25 MHO 24.32 CHO 24		M25 M32 Pg 21	
	Hoods, 4 pegs, without gasket, top entry		MHV 24.25 MHV 24.32 CHV 24	M25 M32 Pg 21	
	Hoods, 4 pegs, without gasket, side or top entry, high construction To be used only with a complete cable gland	MFO 24.32 MFO 24.40 CFO 24.21 CFO 24.29	MFV 24.32 MFV 24.40 CFV 24.21 CFV 24.29	M32 M40 Pg 21 Pg 29	
	Hoods, 4 pegs, without gasket, high construction, designed to be drilled	Without entry CAC 24			

C-TYPE

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CSHT	16 A	24 + ☉ B.68	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CQE / CQEY	16 A	46 + ☉ B.75,85					
CQEE	16 A	64 + ☉ B.79					
CD	10 A	64 + ☉ B.91					
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Accessories:

CHCP 24
Dust protection
cover
Page G.46