

C-TYPE series

Housings and hoods – 2 levers – with gasket

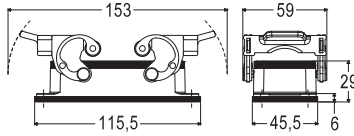
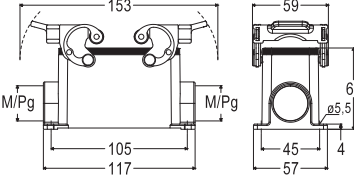
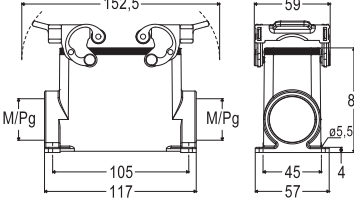
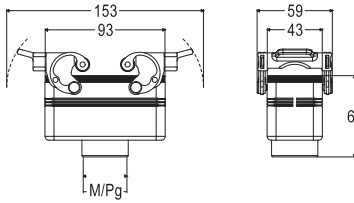

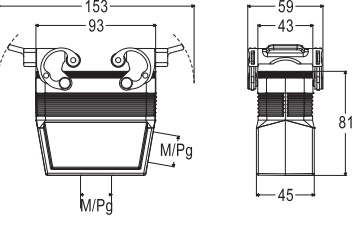
size **77.27**Heavy-Duty
Applications

CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

C[®]ALUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHI 16		
	Surface mounting housings, 2 levers and gasket	MHP 16.25 MHP 16.225 CHP 16 CHP 16.2	M25 M25 × 2 Pg 21 Pg 21 × 2	
	Surface mounting housings, 2 levers and gasket, high construction To be used only with a complete cable gland	MAP 16.25 MAP 16.225 MAP 16.32 MAP 16.232 MAP 16.40 MAP 16.240 CAP 16.21 CAP 16.221 CAP 16.29 CAP 16.229	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2 Pg 21 Pg 21 × 2 Pg 29 Pg 29 × 2	
	Hoods, 2 levers and gasket, top entry	MHV 16 G32 CHV 16 G	Top entry M32 Pg 21	
	Hoods, 2 levers and gasket, side or top entry, high construction To be used only with a complete cable gland	Side entry MFO 16 G40	Top entry M25 M32 M40 Pg 21 Pg 29	

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	16 + ⊕	B.40	CP / CPY 35 A	6 + ⊕	B.112,114	MIXO modules	C.12-93
CCE 16 A	16 + ⊕	B.46	CSS 16 A	16 + ⊕	B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	16 + ⊕	B.54,60	CT / CTSE* 16 A	16 + ⊕	B.128,132		
CSHT 16 A	16 + ⊕	B.67	CT / CTS* 10 A	40 + ⊕	B.138,140		
CQE / CQEY 16 A	32 + ⊕	B.74,84	CMCE / CMSH 16 A	6 + 2 (aux.) + ⊕	B.145,150		
CQEE 16 A	40 + ⊕	B.78	CX / CXC 80 A/16 A	4/0, 4/2 + ⊕	B.158-160		
CD 10 A	40 + ⊕	B.90	CX 40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ⊕	B.163-164, 168-169		
CDD 10 A	72 + ⊕	B.94					
CDSH 10 A	27 + ⊕	B.104					

*can be used only in bulkhead mounting housings

Accessories:



CHCP 16
Dust protection
cover
Page G.46



CR LCK
Locking
device
Page G.43