

CCE 10

16 A 500 V

size **57.27**

10 poles +

Crimp connection

EN 61984 rating	16 A 500 V 6 kV 3
	16 A 400 / 690 V 6 kV 2
Rated voltage (UL / CSA)	600 V
Insulation resistance	$\geq 10 \text{ G}\Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Ambient temperature limit	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK EAC



ECBT2.E115072 | ECBT8.E115072
PVVA2.E506437 | PVVA8.E506437

Item	Description	Part No.	Dimension
	Male inserts for male contacts Without contacts (to be ordered separately)	CCEM 10	
	Female inserts for female contacts Without contacts (to be ordered separately)	CCEF 10	
	16 A advanced opening contacts section (mm ²) section (AWG) 0,5 20 0,75 18 1 18 1,5 16 2,5 14	Male CC 0.5 AN CC 0.7 AN CC 1.0 AN CC 1.5 AN CC 2.5 AN	Female
	16 A crimp contacts section (mm ²) section (AWG) 0,14-0,37 26-22 0,5 20 0,75 18 1 18 1,5 16 2,5 14 3 12 4 12	Male CCMA 0.3 CCMA 0.5 CCMA 0.7 CCMA 1.0 CCMA 1.5 CCMA 2.5 CCMA 3.0 CCMA 4.0	Female CCFA 0.3 CCFA 0.5 CCFA 0.7 CCFA 1.0 CCFA 1.5 CCFA 2.5 CCFA 3.0 CCFA 4.0
	0,14-0,37 26-22 0,5 20 0,75 18 1 18 1,5 16 2,5 14 3 12 4 12	Male CCMD 0.3 CCMD 0.5 CCMD 0.7 CCMD 1.0 CCMD 1.5 CCMD 2.5 CCMD 3.0 CCMD 4.0	Female CCFD 0.3 CCFD 0.5 CCFD 0.7 CCFD 1.0 CCFD 1.5 CCFD 2.5 CCFD 3.0 CCFD 4.0

Wiring information, CC contacts

conductor section (mm ²)	conductor slot ø A (mm)	stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3,0	2,55	7,5
4,0	2,85	7,5

Wire diameter: up to 4,7 mm.

For basic or high thickness gold plating, please refer to page F.13.

It is recommended to use the crimping tools and removal tools homologated by ILME (please see page F.23)

Materials

Insert	polycarbonate (PC)
UL 94 flame rating	V-0
Colour	pebble grey, RAL 7032
Contacts	copper alloy, silver and gold plated



CR CPQ

Coding pins
Page G.3

Enclosures size 57.27

Pages


Heavy-Duty Applications	
Metallic with C-TYPE lever	E.54-61
Metallic with IL-BRID lever	E.92-95,105
Metallic with JEI®-P lever	E.113-114,119
Metallic with V-TYPE IP67 lever	E.125,130-131
Thermoplastic T-TYPE	E.228-229,234-235

Aggressive Environments

Metallic IP68 high protection	E.144-145
Metallic W-TYPE	E.156-157,163
Metallic E-Xtreme®	E.176-177,184-185,195
Thermoplastic T-TYPE/W	E.228-229,234-235

Specialized Applications

EMC (Electromagnetic Shielding)	E.210-211,217
Hygienic series for food and beverage	E.245,248
Standard applications with Central lever	E.256-257
BIG Enclosures for multiple cable entries	E.269,274-275
COB system for switch cabinet	E.286-289
Light and Sound applications with JEI®-P lever	E.298-299

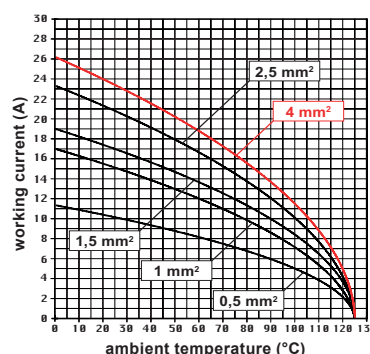

CCE 10 inserts max. current load derating diagram