

Slim enclosures – W-TYPE series

Housings and covers – 2 levers

Hoods and covers – 4 pegs

size **66.40**

Aggressive
Environments




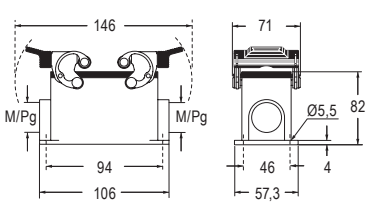



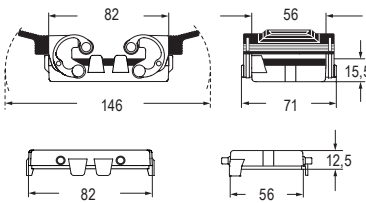
CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHIW 50		
	Surface mounting housings, 2 levers and gasket	MHPW 50.32 MHPW 50.240 CHPW 50.21 CHPW 50.229	M32 M40 × 2 Pg 21 Pg 29 × 2	
	Hoods, 4 pegs, without gasket, side entry	Side entry MHOW 50.25 MHOW 50.32 CHOW 50	M25 M32 Pg 21	
	Hoods, 4 pegs, without gasket, side or top entry, high construction, with metal adapter	Side entry MAOW 50.32 CAOW 50.29 Top entry MAVW 50.32 CAVW 50.29	M32 Pg 29	
 	Covers, with 2 levers and gasket (for enclosures with 4 pegs without gasket) or with 4 pegs, without gasket (for enclosures with 2 levers and gasket) with loop for hoods  or with eyelet for housings 	With 2 levers and loop CHCW 50 G With 4 pegs and loop CHCW 50 S With 4 pegs and eyelet CHCW 50		

Inserts size (66.16) × 2	Poles	Pages
CDA 16 A	32 + ⊕	B.18
CDC 16 A	32 + ⊕	B.21
CSAH 16 A	32 + ⊕	B.26
CD 10 A	50 + ⊕	B.32
CDD 10 A	76 + ⊕	B.34