

C-TYPE series

Housings and hoods – 2 levers – with gasket

size **77.62**

Heavy-Duty Applications




CE UK
CA




ECBT2.E115072 | ECBT8.E115072

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



Item	Description	Part No.	With cover	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHI 32			

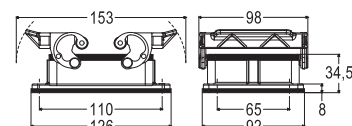

 Surface mounting housings, 2 levers and gasket	MHP 32.40 MHP 32.240 MHP 32.50 MHP 32.250 CHP 32.29 CHP 32.229 CHP 32 CHP 32.2 CHP 32.42 CHP 32.242	M40 M40 × 2 M50 M50 × 2 Pg 29 Pg 29 × 2 Pg 36 Pg 36 × 2 Pg 42 Pg 42 × 2 
---	---	---

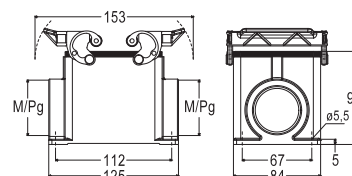

	Hoods, 2 levers and gasket, top entry To be used only with a complete cable gland	Top entry MVF 32 G32 MVF 32 G40 MVF 32 G50 CFV 32 G29 CFV 32 G CFV 32 G42	M32 M40 M50 Pg 29 Pg 36 Pa 42	
---	---	--	---	---



Inserts size (77.27) × 2	Poles 	Pages
CNE 16 A	32 + ⊕	B.42
CCE 16 A	32 + ⊕	B.48
CSH / JSH S 16 A	32 + ⊕	B.56,62
CQE / CQEY 16 A	64 + ⊕	B.76,86
CD 10 A	80 + ⊕	B.92
CDD 10 A	144 + ⊕	B.98
CDSH 10 A	54 + ⊕	B.106
CP / CPY 35 A	12 + ⊕	B.113,115

Inserts size (77.27) × 2	Poles 	Pages
CSS 16 A	32 + ⊕	B.122
CTSE* 16 A	32 + ⊕	B.134
CMCE / CMSH 16 A	12 + 4 (aux.) + ⊕	B.147,152

*can be used only in bulkhead mounting housings

MIXO Modular Inserts	Pages
MIXO modules	C.12-93
CX 04 T (4-slot sized MIXO frames) × 2	C.95