

E-Xtreme® – C-TYPE lever version

Housings, hoods and covers – 2 levers – with gasket

size **57.27**

2 000 hrs resistance
in salt-spray tests



Aggressive
Environments




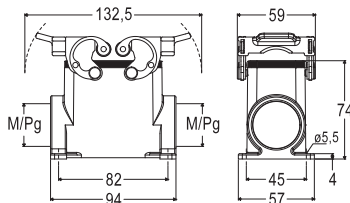
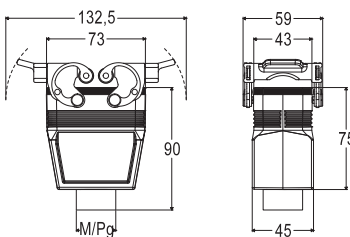
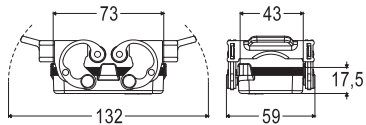

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK



CFLUS

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHIE 10		
	Surface mounting housings, 2 levers and gasket, high construction	MAPE 10.32	M32	
	Hoods, 2 levers and gasket, top entry, high construction, with metal adapter	MAVE 10 G32	M32	
	Covers, 2 levers and gasket	CHCE 10 G		
	For enclosures with 4 pegs without gasket with loop for hoods 			

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CT / CTSE*	16 A	10 + ☉ B.127,131
CCE	16 A	10 + ☉ B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CSH / JSH S	16 A	10 + ☉ B.53,59	CX	40 A/10 A	8/24 + ☉ B.170-171
CSHT	16 A	10 + ☉ B.66	*can be used only in bulkhead mounting housings		
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts	Pages	
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95

Accessories:



CHCP 10
Dust protection
cover
Page G.46



CR LCK
Locking
device
Page G.43