

W-TYPE series – C-TYPE lever version

size **104.27**

Housings and covers – 2 levers – with gasket

Aggressive
Environments

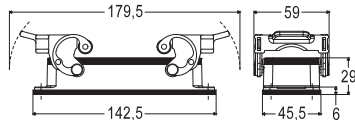
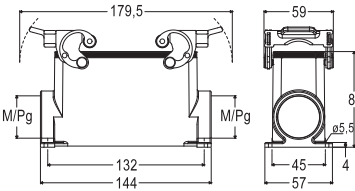
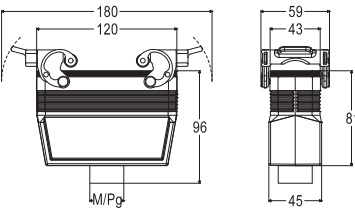


CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CHIW 24		
	Surface mounting housings, 2 levers and gasket, high construction	MAPW 24.32 CAPW 24.21	M32 Pg 21	
	Hoods, 2 levers and gasket, top entry, high construction, with metal adapter	MAVW 24 G32 CAVW 24 G	M32 Pg 21	
	Covers, 2 levers and gasket	CHCW 24 G		
	For enclosures with 4 pegs without gasket with loop for hoods 			

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CT / CTSE*	16 A	24 + ☉ B.129,133	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CT / CTS*	10 A	64 + ☉ B.139,141		
CSHT	16 A	24 + ☉ B.68	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151		
CQE / CQEY	16 A	46 + ☉ B.75,85	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CQEE	16 A	64 + ☉ B.79	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CD	10 A	64 + ☉ B.91	*can be used only in bulkhead mounting housings				
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Complete with:

Hoods
Page E.161Covers
Page E.161