

Metallic – CKA / MKA

Hoods and covers – 2 pegs


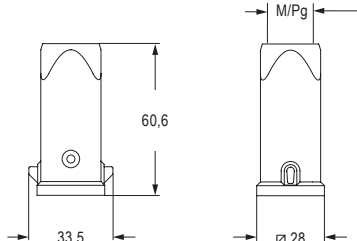

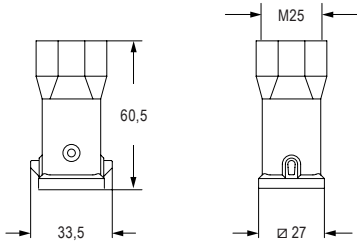



size **21.21**Heavy-Duty
Applications

EN 60529	IP44
With CKR 65	IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12
With CKR 65	Type 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, 2 pegs, side entry Not suitable for CQ4 series inserts	MKA VA20 CKA 03 VAS	M20 Pg 11	
	Hoods, 2 pegs, top entry Not suitable for CQ4 series inserts	MKA V20 CKA 03 VS	M20 Pg 11	
	Hoods, 2 pegs, side entry	MKA VA25	M25	
	Hoods, 2 pegs, top entry	MKA V25	M25	
	Covers, 2 pegs, with or without gasket For enclosures with 1 lever with loop for hoods  or with eyelet for housings 	With loop With gasket (for female inserts) CKA 03 CS Without gasket (for male inserts) CKA 03 CAS With eyelet CKA 03 C CKA 03 CA		 

Compact 21.21 Inserts	Poles	Pages
CQ4 / CQ / CQY	40 A to 6,5 A	A.4-12
CK / JK / CKSH	10 A	A.16-19
CD / CDY	10 A	A.24-25

Note: to obtain the IP66 / IP67 / IP69 degree of protection it is necessary to replace the fixing screw supplied with all inserts, with the one with gasket included in the CKR 65 kit, to be purchased separately, except for the inserts listed below (already supplied with a fixing screw with gasket):

- CQF/M 07, CQF/M 12

Accessories:



CKR 65
gasket and screw kits for
IP66 / IP67 / IP69
Page A.67